



# Structured Cable Products™


Quality Installations Deserve Quality Products

www.spcat5e.com  
 sales@scpat5e.com  
 Direct: 954-327-5770  
 Toll Free: 866-470-5742

**SCP PART#: 12/4OFC-HD-WT-D** UPC: 817777015706

**DESCRIPTION:**

Dca EUROCLASS- INDOOR/OUTDOOR SPEAKER CABLE- 4C/12 AWG 65 STRAND OXYGEN FREE COPPER, UL CMR, EN50575:2014 Dca-s3,d2,a3 SUN RES HD PVC JKT- WHITE- 500 FT/152M SPOOL

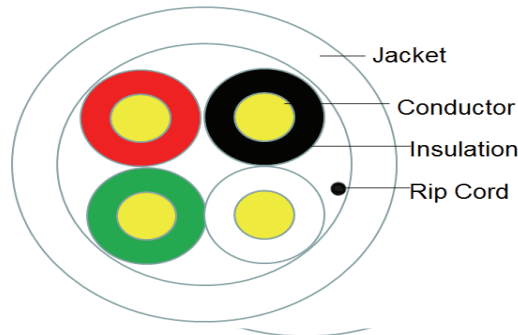

**Regulatory**

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)  
 EU RoHS 2011/65/EU Compliant  
 EN50575: 2014 REACTION TO FIRE CLASS Dca - s3, d2, a3

**Application:** Speaker Cable

**Construction Characteristics:**

Conductor	Material	Stranded Bare Copper
	Size	12AWG X 4C(3.28mm <sup>2</sup> )
	Construction	65/0.254mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	3.20mm +/-0.1mm
Jacket	Colors	Black & Red & Green & White
	Material	PVC
	Min.Thickness	0.80mm
	AVG.Thickness	0.95mm
	Diameter	9.8mm +/-0.20mm
	Rip Cord	Nylon
Bend radius	Color	Per request
	Min 15D/150mm	

**Electrical & Physical Characteristics:**

Operating Temperature Range	- 20°C + 75°C
Conductor Resistance	Max 5.8 ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	Max 300Volts

Marking:			
STRUCTURED CABLE PRODUCTS --- 12/4OFC-HD-D--- E198137 SCP3 (UL) CL3 C(UL) CMR 4C 12AWG 65 STRAND OFC -- INDOOR/OUTDOOR-SUN RES -- EN50575:2014 CE Dca-s3,d2,a3, HD-PVC JKT FT4 75C RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M			
Packaging:			
Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
30.04kgs/66.235lbs	360X220X160	500FT/Spool	36