

**SCP PART#: 14/2OFC-HD-WT-HDBX**


Rev03/21

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE- 2C/14 AWG 105 STRAND  
OXYGEN FREE COPPER, UL CMR, SUN RES HD PVC JKT- WHITE -  
500 FT/152M HD BOX

**Regulatory**

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)

EU RoHS 2011/65/EU Compliant

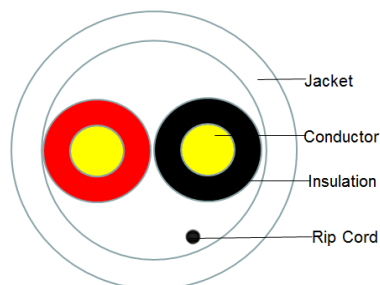

**Application:** Speaker cable

**Construction Characteristics:**

Conductor	Material	Stranded Bare Copper
	Size	14AWG X 2C(2.11mm <sup>2</sup> )
	Construction	105/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	2.70mm +/-0.10mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.80mm
	AVG.Thickness	0.95mm
	Diameter	7.20mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/110mm	

**Electrical & Physical Characteristics:**

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 9.2ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	300V
Test Voltage	800V/min
Impedance(near by)	62 ± 6 Ω
Capacitance(near by)	28.9 ± 3pf/ft

**Marking:**

STRUCTURED CABLE PRODUCTS --- 14/2OFC-HD --- E198137 SCP3 (UL) CL3 C(UL) CMR 2C 14AWG  
105 STRAND OFC -- INDOOR/OUTDOOR-SUN RES -- CE UV-PVC JKT FT4 75C RoHS  
ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*M

**Packaging:**

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
12kgs/26.455lbs	343*258*353	500ft/Box	36