



Structured Cable Products®


Quality Installations Deserve Quality Products

www.spcat5e.com
 sales@scpat5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: 14/4OFC-HD-BK UPC: 817777013689

DESCRIPTION:

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE- 4C/14 AWG 105 STRAND OXYGEN FREE COPPER, UL CMR, EN50575:2014 Eca, DIRECT BURY/SUN RES HD PVC JKT- BLACK- 500 FT/152M REEL IN BOX

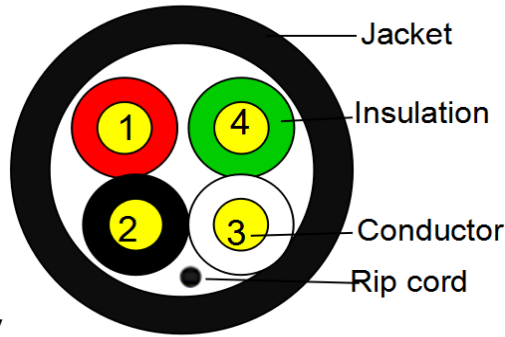

Power limited
 not to exceed 80v

Regulatory

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)
 EU RoHS 2011/65/EU Compliant
 EN50575: 2014 REACTION TO FIRE CLASS Dca

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	14AWG X 4C
	Construction	105/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	2.7mm +/-0.10mm
	Colors	Black & Red & White & Green
Jacket	Material	PVC
	Min.Thickness	0.80mm
	AVG.Thickness	0.95mm
	Diameter	8.3mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/125mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 9.2 ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage - Insulated/Operating	Max 300V/80V
Test Voltage	800V/min
Impedance:	
opposite:	86 ± 5 Ω
near by:	70 ± 5 Ω
Capacitance:	
opposite:	19.6 ± 3pf/ft
near by:	26 ± 3pf/ft
Marking:	
STRUCTURED CABLE PRODUCTS --- 14/4OFC-HD --- E198137 SCP3 (UL) CL3 C(UL) CMR 4C 14AWG 105 STRAND OFC -- INDOOR/OUTDOOR-SUN RES -- EN50575:2014 CE Dca UV-PVC JKT FT4 75C RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M	



Structured Cable Products®

Quality Installations Deserve Quality Products

www.spcat5e.com
sales@scpat5e.com
Direct: 954-327-5770
Toll Free: 866-470-5742

SCP PART#: 14/4OFC-HD-BK	UPC: 817777013689
---------------------------------	-------------------

DESCRIPTION:

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE- 4C/14 AWG 105 STRAND OXYGEN FREE COPPER, UL CMR, EN50575:2014 Eca, DIRECT BURY/SUN RES HD PVC JKT- BLACK- 500 FT/152M REEL IN BOX

Packaging:			
Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
22.5kgs/49.603lbs	270X100X300	500ft/REEL IN BOX	27
	310X340X350		