


SCP PART#: 18/2OFC-LSZH-PUR

DESCRIPTION: Speaker Cable LSZH - 2C/18 AWG Stranded Oxygen Free Copper, EN50575 Dca, Low Smoke Zero Halogen Jkt- Purple- 1000ft/305m Box

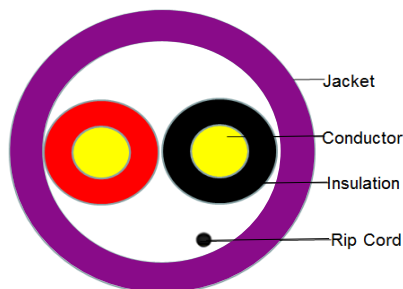

Regulatory

EN50575: 2014 REACTION TO FIRE CLASS Dca
 EU RoHS 2011/65/EU Compliant

Application: Speaker cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	18AWG X 2C(1.5mm ²)
	Construction	16/0.25mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.30mm
	AVG.Thickness	0.33mm
	Diameter	1.70mm +/-0.10mm
	Colors	Black & Red
Jacket	Material	LSZH
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	4.5mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/75mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max25.5 ohm/km at 20°C
Insulation Resistance	Min 50M! *km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Volage	Max 80Volts

Marking:

STRUCTURED CABLE PRODUCTS -- 18/2OFC-LSZH -- 2C 18AWG 16 STRAND OXYGEN FREE COPPER LSZH JKT EN50575 CE Dca RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9
 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
10.2kgs	280X260X280	1000ft/ Box	48/64