



# Structured Cable Products™


Quality Installations Deserve Quality Products

www.scp5e.com  
 sales@scp5e.com  
 Direct: 954-327-5770  
 Toll Free: 866-470-5742

SCP PART#: CAT6-S-BL

UPC: 817777011685

CAT6 SIAMESE- 2x ENHANCED 550 MHz 23 AWG SOLID BC 4PR, UTP, ANSI/TIA-568-C.2, IEC 11801 CLASS E, UL CMR PVC JKT- BLUE- 1000 FT SPOOL

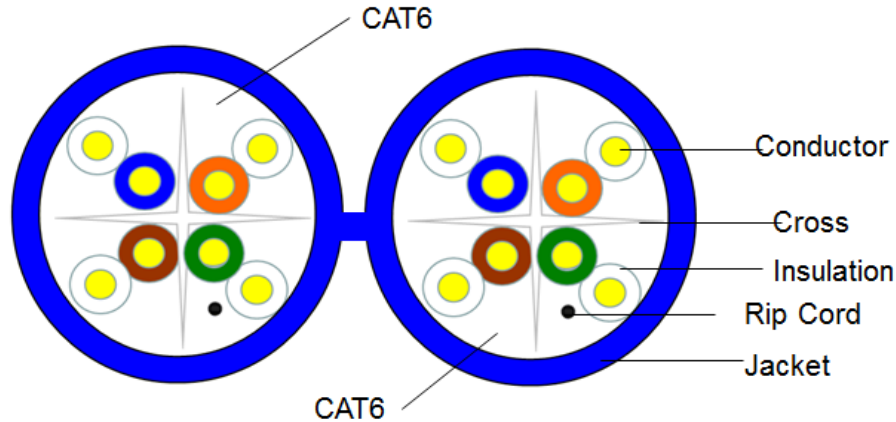

**Regulatory**

UL 444, TIA/EIA 568-C.2 and ISO/IEC 11801 Ed2  
 Type (UL) CMR or c(UL) FT4  
 EU RoHS 2011/65 EU Compliant

**Application:** Lan Cable

**Construction Characteristics:**

2XCAT6		
Conductor	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.57+/-0.005mm
Insulation	Material	HDPE
	Min.Thickness	0.200mm
	AVG.Thickness	0.220mm
	Diameter	1.03+/-0.01mm
	Colors	Blue- White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	6.20+/-0.10mm
	Rip Cord	Nylon
	Color	Blue / Blue
Assembly	Shape: " 8"	
Bend radius	Min 20D/125mm	



# Structured Cable Products™

Quality Installations Deserve Quality Products

www.scpcat5e.com  
 sales@scpcat5e.com  
 Direct: 954-327-5770  
 Toll Free: 866-470-5742

**SCP PART#: CAT6-S-BL**

UPC: 817777011685

**Electrical & Physical Characteristics:**

Operating Temperature Range	- 20°C +75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 72.2ohm/km at 20°C
Dielectric Strength	Min AC1.5KV
Spark Test	5.0KV
Rated Voltage	Max 300Volts
DC Resisitance Unbalance	Max 5%
Pair-to-Ground Capacitance Unbalance	Max 3300pF/km
Characteristic Impedance	100+/- 15OHM
Nominal Velocity of Propagation(%)	67~69
Propagation Delay	Max 536ns/100m
Delay Skew	Max 45ns/100m

**Marking:**

STRUCTURED CABLE PRODUCTS --- CAT6-S --- CAT6 SIAMESE-2X ENHANCED  
 550MHz UTP ANSI/TIA-568-C.2 ISO/IEC 11801 CLASS E E198134 SCP3 (UL)  
 C(UL) CMR 4PR 23AWG SOL BC - EN50575:2014 CE Dca PVC JKT FT4 75C EU  
 RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*FT

**Packaging:**

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
29kgs/63.93lbs	400X330X160	1000FT/SPOOL	27

**Performance-1**

ITEM Frequenc	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	rd	SCP
1	2	1.9	74.3	80.3	72.3	76.6	72.3	78.4
4	3.8	3.7	65.3	75.6	63.3	74.2	61.5	71.9
8	5.3	5.1	60.8	66	58.8	65.1	55.5	60.9
10	6	5.8	59.3	67.6	57.3	65.9	53.3	61.8
16	7.6	7.4	56.2	70.8	54.2	67.2	48.6	63.4
20	8.5	8.2	54.8	71.9	52.8	69.1	46.3	63.7
25	9.5	9.1	53.3	62.3	51.3	60.8	43.8	53.2
31.25	10.7	9.9	51.9	68.7	49.9	67.1	41.2	58.8
62.5	15.4	15	47.4	59.6	45.4	58.3	32	44.6
100	19.8	18.8	44.3	60	42.3	58	24.5	41.2
200	29	27.4	39.8	57.5	37.8	56	10.8	30.1
250	32.8	29.4	38.3	55.8	36.3	54.1	5.5	26.4
300	36.4	33.3	37.1	54.2	35.1	53.4	0.7	20.9
400	43	38.6	35.3	53.8	33.3	52.1	---	---
500	48.9	43.9	33.8	51	31.8	49.3	---	---



# Structured Cable Products™

Quality Installations Deserve Quality Products

www.scpcat5e.com  
 sales@scpcat5e.com  
 Direct: 954-327-5770  
 Toll Free: 866-470-5742

SCP PART#: CAT6-S-BL

UPC: 817777011685

## Performance-2

ITEM Frequenc	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	rd	SCP
1	20	23.6	67.8	75.6	64.8	73.3	70.3	74.7
4	23	23.9	55.8	61.3	52.8	60.1	59.5	70.5
8	24.5	30	49.7	55.7	46.7	54.8	53.5	60
10	25	28.5	47.8	55.2	44.8	53.2	51.3	60.1
16	25	28.2	43.7	49.7	40.7	48.1	46.6	59.8
20	25	27.8	41.8	48.1	38.8	46.2	44.3	60.9
25	24.3	27.5	39.8	45.9	36.8	45	41.8	51.7
31.25	23.6	24.9	37.9	42.7	34.9	41.7	39.2	57.2
62.5	21.5	24.1	31.9	39.4	28.9	37.4	30	43.3
100	20.1	23.5	27.8	35	24.8	33.2	22.5	39.2
200	18	23.2	21.8	32.8	18.8	30.2	8.8	28.6
250	17.3	21.5	19.8	30.7	16.8	27.7	3.5	24.7
300	16.8	20.8	18.3	26.5	15.3	25.4	---	---
400	15.9	18.9	15.8	23.4	12.8	22.1	---	---
500	15.2	18.6	13.8	19.5	10.8	18.7	---	---