

**CATEGORY 6 CABLE, 4 PAIR, UTP, UL CMR, HD BOX**

Rev02/22


**Description:**

CAT6 ENHANCED 550 MHz 23 AWG SOLID BC, 4PR, UTP, ANSI/TIA 568.2-D, ISO/IEC 11801 CLASS E, UL CMR, PVC JKT, 1000FT/305M HD BOX

Part Number:	Jacket Color:
CAT6-BK-HDBX	Black
CAT6-BL-HDBX	Blue
CAT6-GN-HDBX	Green
CAT6-GY-HDBX	Gray
CAT6-OR-HDBX	Orange
CAT6-WT-HDBX	White
CAT6-YL-HDBX	Yellow

**Regulatory:**

UL 444, ANSI/TIA 568.2-D,  
ISO/IEC 11801 CLASS E  
Type (UL) CMR or c(UL) FT4  
EU RoHS 2011/65 EU Compliant  
PoE: IEEE 802.3bt

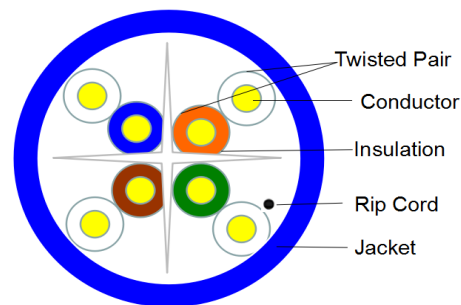

**Application:**

Networking Lan Cable

**Construction Characteristics:**

Conductor	Material	Solid Bare Copper	
	Size	23AWG X 4P	
	Construction	1/0.57+/-0.005mm	
Insulation	Material	HDPE	
	Min.Thickness	0.200mm	
	AVG.Thickness	0.220mm	
	Diameter	1.03+/-0.01mm	
	Colors		Blue- White/Blue
			Orange-White/Orange
		Green-White/Green	
Jacket	Material	PVC	
	Min.Thickness	0.54mm	
	AVG.Thickness	0.60mm	
	Diameter	6.20+/-0.10mm	
	Rip Cord	Nylon	
	Color	Per request	
Bend Radius		Min 20D/125mm	

**Electrical & Physical Characteristics:**

Operating Temperature Range		- 20°C +75°C	
Minimum Installation Temperature		0°C + 40°C	
Conductor Resistance		Max 72.2ohm/km at 20°C	
Dielectric Strength		Min AC1.5KV	
Spark Test		5.0KV	
Insulation	Unaged	Tensile Strength	16.5Mpa
		Elongation	500%
	Aged	Tensile Strength	14.2Mpa(100°C 168h)
		Elongation	250%(100°C 168h)
Jacket	Unaged	Tensile Strength	13.8Mpa
		Elongation	100%
	Aged	Tensile Strength	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Rated Voltage		Max 300Volts	
DC Resisitance Unbalance		Max 5%	
Pair-to-Ground Capacitance Unbalance		Max 3300pF/km	
Characteristic Impedance		100+/-15OHM	
Nominal Velocity of Propagation(%)		67~69	
Propagation Delay		Max 536ns/100m	
Delay Skew		Max 45ns/100m	

**Marking:**

STRUCTURED CABLE PRODUCTS --- CAT6 --- CAT6 ENHANCED 550MHz UTP ANSI/TIA 568.2-D ISO/IEC 11801 CLASS E  
E198134 SCP3 (UL) C(UL) CMR 4PR 23AWG SOL BC - PVC JKT FT4 75C EU RoHS EC  
ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*M

**Packaging:**

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
14.5kgs/31.526lbs	405*258*418	1000FT/Box	20/30

### Performance-1

ITEM Frequency	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	2	1.9	74.3	80.3	72.3	76.6	72.3	78.4
4	3.8	3.7	65.3	75.6	63.3	74.2	61.5	71.9
8	5.3	5.1	60.8	66	58.8	65.1	55.5	60.9
10	6	5.8	59.3	67.6	57.3	65.9	53.3	61.8
16	7.6	7.4	56.2	70.8	54.2	67.2	48.6	63.4
20	8.5	8.2	54.8	71.9	52.8	69.1	46.3	63.7
25	9.5	9.1	53.3	62.3	51.3	60.8	43.8	53.2
31.25	10.7	9.9	51.9	68.7	49.9	67.1	41.2	58.8
62.5	15.4	15	47.4	59.6	45.4	58.3	32	44.6
100	19.8	18.8	44.3	60	42.3	58	24.5	41.2
200	29	27.4	39.8	57.5	37.8	56	10.8	30.1
250	32.8	29.4	38.3	55.8	36.3	54.1	5.5	26.4
300	36.4	33.3	37.1	54.2	35.1	53.4	0.7	20.9
400	43	38.6	35.3	53.8	33.3	52.1	---	---
500	48.9	43.9	33.8	51	31.8	49.3	---	---

### Performance-2

ITEM Frequency	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	20	23.6	67.8	75.6	64.8	73.3	70.3	74.7
4	23	23.9	55.8	61.3	52.8	60.1	59.5	70.5
8	24.5	30	49.7	55.7	46.7	54.8	53.5	60
10	25	28.5	47.8	55.2	44.8	53.2	51.3	60.1
16	25	28.2	43.7	49.7	40.7	48.1	46.6	59.8
20	25	27.8	41.8	48.1	38.8	46.2	44.3	60.9
25	24.3	27.5	39.8	45.9	36.8	45	41.8	51.7
31.25	23.6	24.9	37.9	42.7	34.9	41.7	39.2	57.2
62.5	21.5	24.1	31.9	39.4	28.9	37.4	30	43.3
100	20.1	23.5	27.8	35	24.8	33.2	22.5	39.2
200	18	23.2	21.8	32.8	18.8	30.2	8.8	28.6
250	17.3	21.5	19.8	30.7	16.8	27.7	3.5	24.7
300	16.8	20.8	18.3	26.5	15.3	25.4	---	---
400	15.9	18.9	15.8	23.4	12.8	22.1	---	---
500	15.2	18.6	13.8	19.5	10.8	18.7	---	---