


SCP PART#: HNC-EF-3

Rev0823

DESCRIPTION: Fiber/Copper Hybrid - (2) Cat6 UTP UL CMR (White/Gray) + (1) Cat6a U/FTP UL CMR (Blue) + (1) 2-Strand Tight Buff Dist OM3 SCP EasyFiber w/Corning Clearcurve, UL OFNR (Aqua), Blue Overall Jacket-500ft/152m Spool

Regulatory

UL 444 ANSI/TIA 568.2-D and ISO/IEC 11801
 Type (UL) CM,CMG
 EU RoHS 2011/65 EU Compliant

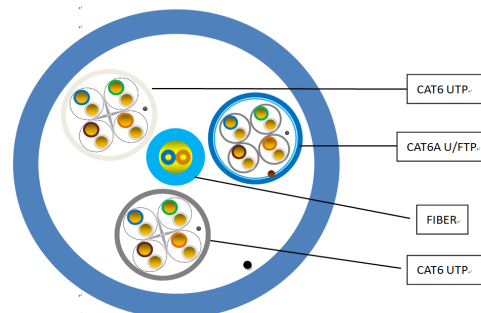

Application: BUNDLE CABLE

Construction Characteristics:

Conductor (2*CAT6)	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.57+/-0.005mm
Insulation	Material	HDPE
	Min.Thickness	0.200mm
	AVG.Thickness	0.220mm
	Diameter	1.03+/-0.10mm
	Colors	Blue- White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	6.20+/-0.20mm
	Rip Cord	Nylon
Colors	White,Gray	
Conductor (1*Fiber)	Count	2
	Type	Corning Clear Curve [®] OM3
	OD(mm)	4.0±0.5
	Wall Thickness	0.7±0.1
	Color	Aqua
Material	UL PVC - OFNR	

Conductor (1*CAT6A U/FTP)	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.57+/-0.005mm
Insulation	Material	Skin-foam-skin PE
	Min.Thickness	0.350mm
	AVG.Thickness	0.360mm
	Diameter	1.35+/-0.05mm
	Colors	Light blue/Blue Light orange/Orange Light green/Green Light brown/Brown
Pair screen	Every pair screen	Aluminum Foil
Drain wire	TC	1/0.40+/-0.005
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	7.30+/-0.20mm
	Rip Cord	Nylon
Color	Blue	

Assembly(2*CAT6 UTP+1*CAT6A U/FTP+1*FIBER)		
Jacket	Material	PVC
	Min.Thickness	0.70mm
	AVG.Thickness	0.80mm
	Diameter	19.0+/-2.0mm
	Rip Cord	Nylon
Colors	Blue	
Bend radius	Min 20D/380mm	

Electrical & Physical Characteristics: (CAT6)

Operating Temperature Range	- 20°C +75°C
Dielectric Strength	Min AC1.5KV
Spark Test	5.0KV
Rated Voltage	Max 300Volts
DC Resisitance Unbalance	Max 5%
Pair-to-Ground Capacitance Unbalance	Max 330pF/100m
Nominal Velocity of Propagation(%)	66
Delay Skew	Max 45ns/100m

Performance-1

ITEM Frequenc	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	2	1.9	74.3	80.3	72.3	76.6	72.3	78.4
4	3.8	3.7	65.3	75.6	63.3	74.2	61.5	71.9
8	5.3	5.1	60.8	66	58.8	65.1	55.5	60.9
10	6	5.8	59.3	67.6	57.3	65.9	53.3	61.8
16	7.6	7.4	56.2	70.8	54.2	67.2	48.6	63.4
20	8.5	8.2	54.8	71.9	52.8	69.1	46.3	63.7
25	9.5	9.1	53.3	62.3	51.3	60.8	43.8	53.2
31.25	10.7	9.9	51.9	68.7	49.9	67.1	41.2	58.8
62.5	15.4	15	47.4	59.6	45.4	58.3	32	44.6
100	19.8	18.8	44.3	60	42.3	58	24.5	41.2
200	29	27.4	39.8	57.5	37.8	56	10.8	30.1
250	32.8	29.4	38.3	55.8	36.3	54.1	5.5	26.4
300	36.4	33.3	37.1	54.2	35.1	53.4	0.7	20.9
400	43	38.6	35.3	53.8	33.3	52.1	---	---
500	48.9	43.9	33.8	51	31.8	49.3	---	---

Performance-2

ITEM Frequenc	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	20	23.6	67.8	75.6	64.8	73.3	70.3	74.7
4	23	23.9	55.8	61.3	52.8	60.1	59.5	70.5
8	24.5	30	49.7	55.7	46.7	54.8	53.5	60
10	25	28.5	47.8	55.2	44.8	53.2	51.3	60.1
16	25	28.2	43.7	49.7	40.7	48.1	46.6	59.8
20	25	27.8	41.8	48.1	38.8	46.2	44.3	60.9
25	24.3	27.5	39.8	45.9	36.8	45	41.8	51.7
31.25	23.6	24.9	37.9	42.7	34.9	41.7	39.2	57.2
62.5	21.5	24.1	31.9	39.4	28.9	37.4	30	43.3
100	20.1	23.5	27.8	35	24.8	33.2	22.5	39.2
200	18	23.2	21.8	32.8	18.8	30.2	8.8	28.6
250	17.3	21.5	19.8	30.7	16.8	27.7	3.5	24.7
300	16.8	20.8	18.3	26.5	15.3	25.4	---	---
400	15.9	18.9	15.8	23.4	12.8	22.1	---	---
500	15.2	18.6	13.8	19.5	10.8	18.7	---	---

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
43.5 KG	550x400x250	500ft/Spool	8

Jacket Marking:

STRUCTURED CABLE PRODUCTS --- HNC-EF-3-----E198134 SCP3 (UL) C(UL) CM-----4 CORE
 COPPER/FIBER COMPOSITE - 2xCAT6 23AWG SOL BC UTP CMR + 1xCAT6A U/FTP 23AWG SOL BC
 CMR + 1x2-STRAND TIGHT BUF DIST SCP EASYFIBER OM3 50/125 CORNING CLEARCURVE UL OFNR
 PVC JKT RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 *** FEET DDMMYY