


SCP PART#: HNCPROPLUS-6ASH-LSZH-BL-BX

Rev05/21

Description:

HDBaseT Enhanced CAT6A Shielded, 10GBASE-T,
 600 MHz 23 AWG Solid BC, 4PR, U/FTP,
 ANSI/TIA 568.2-D, ISO/IEC 11801 CLASS Ea,
 PoE/PoH IEEE 802.3bt Type 1-4,
 EN50575 Dca-s1,d2,a1 LSZH JKT- BLUE
 1000FT/305M Reel in Box

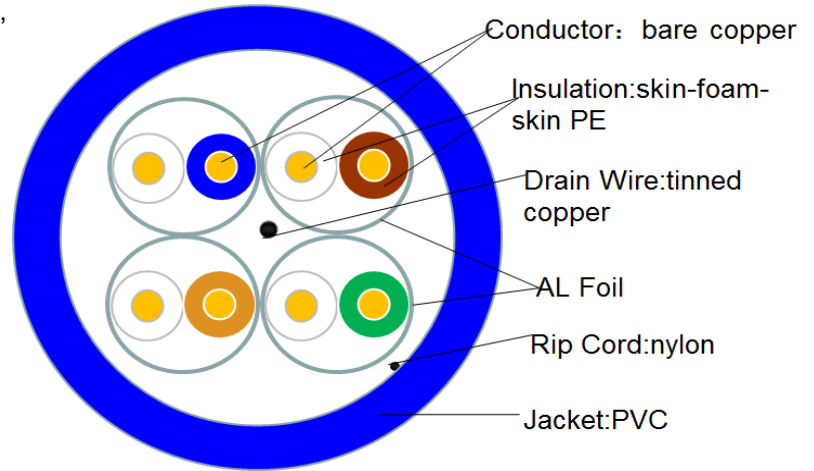

Regulatory

UL 444, ANSI/TIA 568.2-D and ISO/IEC 11801 Class Ea
 EU RoHS 2011/65 EU Compliant
 EN50575 REACTION TO FIRE: Dca-s1,d2,a1

Application: Lan Cable

Construction Characteristics:

Conductor	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.57+/-0.005mm
Insulation	Material	Skin-foam-skin PE
	Min.Thickness	0.350mm
	AVG.Thickness	0.360mm
	Diameter	1.35+/-0.05mm
	Colors	Light blue/Blue Light orange/Orange Light green/Green Light brown/Brown
Pair screen	Every pair screen	Aluminum Foil
Drain wire	TC	1/0.40+/-0.005
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	7.30+/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 20D/150mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 72.2ohm/km at 20°C
Dielectric Strength	Min AC1.5KV
Spark Test	5.0KV
Rated Voltage	Max 300Volts
DC Resistance Unbalance	Max 5%
Pair-to-Ground Capacitance Unbalance	Max 3300pF/km
Characteristic Impedance	100+/-15OHM
Nominal Velocity of Propagation(%)	67-69
Propagation Delay	Max 536ns/100m
Delay Skew	Max 40ns/100m

Marking:

STRUCTURED CABLE PRODUCTS --- CAT6A UFTP --- ENHANCED 10GBASE-T 600MHZ
 U/FTP ANSI/TIA 568.2-D ISO/IEC 11801 CLASS EA 4PR 23AWG SOL BC - EN50575 CE
 Dca PVC JKT FT4 75C EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***FEET

Packaging:

Approx.Wight(kg)	Approx.Dimension(mm)	Package	Packages per pallet
18.6KGS/41.005 LBS	383*323*435	REEL IN BOX	18

Performance-1

ITEM Frequenc	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	2.1	1.9	74.3	80.3	72.3	76.6	72.3	78.4
4	3.8	3.7	65.3	75.6	63.3	74.2	61.5	71.9
8	5.3	5.1	60.8	66	58.8	65.1	55.5	60.9
10	5.9	5.8	59.3	67.6	57.3	65.9	53.3	61.8
16	7.5	7.4	56.2	70.8	54.2	67.2	48.6	63.4
20	8.4	8.2	54.8	71.9	52.8	69.1	46.3	63.7
25	9.4	9.1	53.3	62.3	51.3	60.8	43.8	53.2
31.25	10.5	9.9	51.9	68.7	49.9	67.1	41.2	58.8
62.5	15	15	47.4	59.6	45.4	58.3	32	44.6
100	19.1	18.8	44.3	60	42.3	58	24.5	41.2
200	27.6	27.4	39.8	57.5	37.8	56	10.8	30.1
250	31.1	29.4	38.3	55.8	36.3	54.1	5.5	26.4
300	34.3	33.3	37.1	54.2	35.1	53.4	0.7	20.9
400	43	38.6	35.3	53.8	33.3	52.1	---	---
500	45.3	43.9	33.8	51	31.8	49.3	---	---

Performance-2

ITEM Frequenc	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	20	23.6	68	75.6	65	73.3	70.3	74.7
4	23	23.9	56	61.3	53	60.1	59.5	70.5
8	24.5	30	49.9	55.7	46.9	54.8	53.5	60
10	25	28.5	48	55.2	45	53.2	51.3	60.1
16	25	28.2	43.9	49.7	40.9	48.1	46.6	59.8
20	25	27.8	42	48.1	39	46.2	44.3	60.9
25	24.3	27.5	40	45.9	37	45	41.8	51.7
31.25	23.6	24.9	38.1	42.7	35.1	41.7	39.2	57.2
62.5	21.5	24.1	32.1	39.4	29.1	37.4	30	43.3
100	20.1	23.5	28	35	25	33.2	22.5	39.2
250	17.3	21.5	20	30.7	17	27.7	3.5	24.7
300	16.8	20.8	18.5	26.5	15.5	25.4	---	---
400	15.9	18.9	15.8	23.4	12.8	22.1	---	---
500	15.2	18.6	14	19.5	11	18.7	---	---