




**SCP PART#: LUT-GREEN**

DESCRIPTION: CONTROL/KEYPAD- 2C/22 AWG SHIELDED + 2C/18 AWG STRANDED+DRAIN,  
UL CM, PVC JKT (Compare to Lutron GRX-CBL-346S)- BLUE W/GREEN STRIPE-  
1000FT/305M SPOOL

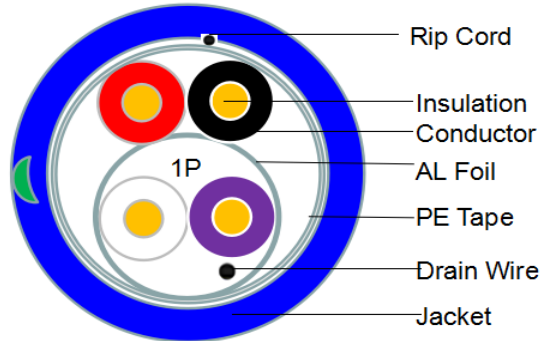

Standard: UL 444 & UL 13, Type (UL) CM,CMG/CL2 c(UL)  
EU RoHS 2011/65/EU Compliant  
EN50575 : 2014 REACTION TO FIRE CLASS Dca

**Construction Characteristics:**

Conductor A	Material	Stranded Bare Copper
	Size	18AWG X 2C
	Construction	7/0.39+/-0.004mm
Insulation	Material	HD PE
	Min.Thickness	0.22mm
	AVG.Thickness	0.24mm
	Diameter	1.70+/-0.05mm
	Colors	Black & Red
Conductor 1P	Material	Stranded Bare Copper
	Size	22AWG X 2C
	Construction	7/0.25+/-0.004mm
Insulation	Material	HD PE
	Min.Thickness	0.25mm
	AVG.Thickness	0.30mm
	Diameter	1.35+/-0.05mm
	Colors	Purple & White
Shield	Drain wire(TC)	7/0.20+/-0.004mm
	Shield	AL Foil
Assembly(2C+1P)	Core wrap	PE Tape
Jacket	Material	Flame rated PVC
	Min.Thickness	0.45mm
	AVG.Thickness	0.50mm
	Diameter	5.30+/-0.20mm
	Rip Cord	Nylon
	Color	Blue with Green Stripe
Bend radius	Min 20D/130mm	

**Electrical & Physical Characteristics:**

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
22AWG Conductor to Screen Capacitance	178 pf/m Max
22AWG Conductor to Conductor Capacitance	96 pf/m Max
Rated Voltage	Max 300Volts
Dielectric Strength	Min AC1.5KV

**Marking:**

STRUCTURED CABLE PRODUCTS --- LUT-GREEN --- E198137 SCP3 (UL) CL2 C(UL) CM  
2C/22AWG STR SHIELDED + 2C/18AWG STR EN50575:2014 CE Dca PVC JKT RoHS  
ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*M

**Packaging:**

Approx.Weight(kg)	Approx.Dimension(mm)	Package	Packages per pallet
17.4kgs/38.36lbs	360X200X160	1000ft/Spool	36