




SCP PART#: SP-2.5/2-LSZH-XX-D

DESCRIPTION: Commercial Speaker Cable - Dca Rated - 2Cond/2.5mm² (14awg) 50x0.25mm (Standard Class 5) Oxygen Free Copper EN50575:2014 Dca-s1,d1,a1 Low Smoke Zero Halogen Indoor/Outdoor UV Sun Res - 305m/1000ft SPOOL

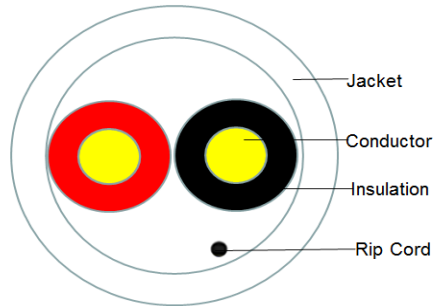

Regulatory

UL : EU RoHS 2011/65/EU Compliant
EN50575: 2014 REACTION TO FIRE CLASS Dca

Application: Speaker Cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	2.50 mm ² X 2C
	Construction	50/0.25mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.30mm
	AVG.Thickness	0.33mm
	Diameter	2.90mm +/-0.1mm
	Colors	Black & Red
Jacket	Material	LSZH+the UV Sun Res compound
	Min.Thickness	0.80mm
	AVG.Thickness	0.90mm
	Diameter	7.8mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/125mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 7.9 ohm/km at 20°C
Insulation Resistance	Min 50M! *km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	MAX 300V
Test Voltage	800V/min

Marking:

--	--	--	--

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
28.5kgs	360*160*300	Spool	27