



Structured Cable Products™

Quality Installations Deserve Quality Products


www.spcat5e.com
 sales@spcat5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: SP-2.5/4-LSZH-BK UPC: 817777015553

DESCRIPTION:

COMMERCIAL SPEAKER CABLE - B2ca EUROCLASS - 4 COND/2.5mm² (14awg) 50x0.25mm OXYGEN FREE COPPER, EN50575:2014 B2ca-s1a,d1,a1 LOW SMOKE ZERO HALOGEN - BLACK JKT- 152M/500FT REEL IN BOX

Conductor 50*0.25±0.008mm Bared copper
 Insulation LSZH
 OD:2.70±0.05mm
 Color: White, Red, Black, Green
 Cabling Color: White-Red- Black-Green
 Rip-cord Stranded rip-cord
 Jacket LSZH
 Thickness: 0.75mm Nom.
 Color :Black(RAL9004)
 O.D.:8.0±0.3mm

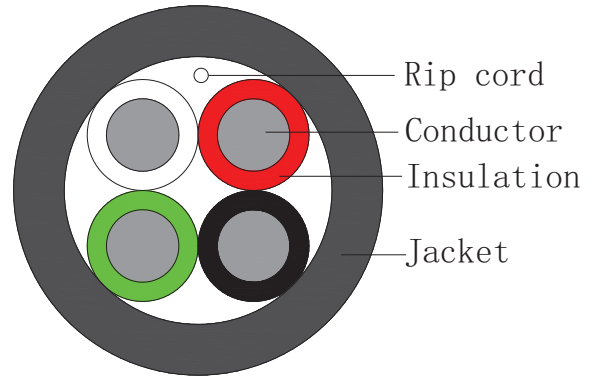

Marking: STRUCTURED CABLE PRODUCTS -- SP-2.5/4-LSZH -- 4C/2.50mm² (14AWG)
 50x0.25mm STRAND OXYGEN FREE COPPER LSZH JKT EN50575:2014 CE
 B2ca-s1a,d1,a1 RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M MM/YY
 NOTE: ***m means continuous length.

Sheath Physical Properties

Before Aging:	Tensile Strength(Mpa)	≥ 10.0
	Elongation(%)	≥ 125
Aging Period:	100°C × 168h	
After Aging :	Tensile Strength(Mpa)	≥ 8.0
	Elongation(%)	≥ 100

Electrical Characteristics(20°C)

Conductor DC Resistance: ≤ 8.62Ω/km

Other Characteristics

Minimum Installation Temperature: -20°C
 Operating Temperature Range: -20°C ~+80°C
 Rated Voltage 300V
 Test Voltage 800V/min
 Minimum Bend Radius: 8 × O.D.

Packing Information

Packing length: 152m(500ft)
 Packaging: REEL-IN-BOX
 Packing Weight: N.W 20.70KGS , G.W 23.20KGS
 Dimension: 42cm x 24 cm x 40cm.
 36 boxes or 24 boxes each pallet