




SCP PART#: SP-4.0/2-LSZH-XX-D

DESCRIPTION: Commercial Speaker Cable - Dca Rated - 2Cond/4.0mm² (12awg) 80x0.25mm (Standard Class 5) Oxygen Free Copper EN50575:2014 Dca-s1,d1,a1 Low Smoke Zero Halogen Indoor/Outdoor UV Sun Res - Black Jkt -305m/1000ft SPOOL

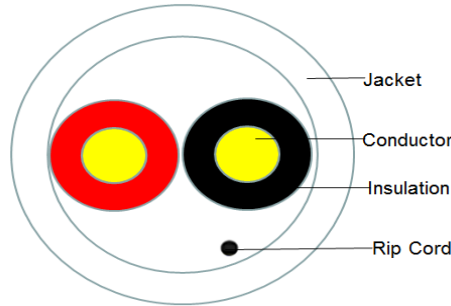

Regulatory

UL: EU RoHS 2011/65/EU Compliant
EN50575 : 2014 REACTION TO FIRE CLASS Dca

Application: Speaker Cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	4.00 mm ² X 2C
	Construction	80/0.25mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.30mm
	AVG.Thickness	0.33mm
	Diameter	3.60mm +/-0.1mm
	Colors	Black & Red
Jacket	Material	LSZH+ the UV Sun Res compound
	Min.Thickness	0.80mm
	AVG.Thickness	0.90mm
	Diameter	9.0mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/125mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 4.9 ohm/km at 20°C
Insulation Resistance	Min 50M! *km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	MAX 300V
Test Voltage	800V/min

Marking:

--	--	--	--

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
44.5kg	500x250x300	Spool	12