

SCP PART#: HNC-9

Description:


2x CAT6 (HNCPROPLUS) 23 AWG SOLID BC, UTP
 + 1x CAT5E (HNCPRO) 24 AWG SOLID BC, UTP
 + 2x RG6/U QUAD SHIELD COAX BC- (BUNDLED)-
 EN50575:2014 Eca, UL CM, PVC JKT- BLUE- 500 FT/152M SPOOL

Regulatory:

UL 444, TIA/EIA 568-C.2 and ISO/IEC 11801 Ed 2
 Type (UL) CM, CMG
 EU RoHS 2011/65 EU Compliant
 EN50575 : 2014 REACTION TO FIRE CLASS Eca

Application:

BUNDLE CABLE

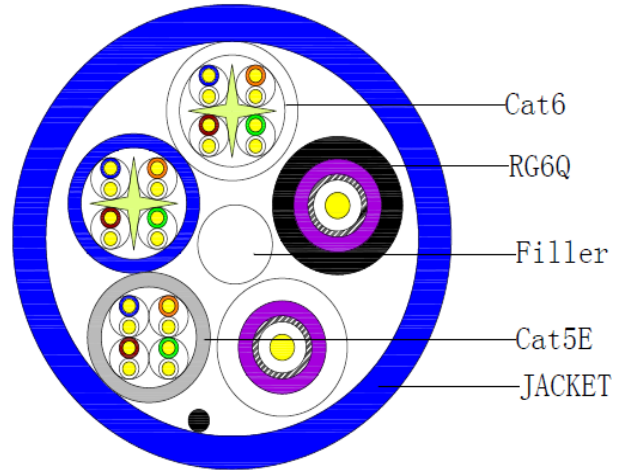

Construction Characteristics:

Conductor(CAT5E)	Material	Solid Bare Copper
	Size	24AWG X 4P
	Construction	1/0.50+/-0.004mm
Insulation	Material	HDPE
	Min.Thickness	0.188mm
	AVG.Thickness	0.205mm
	Diameter	0.90+/-0.10mm
	Colors	Blue- White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	5.20+/-0.20mm
	Rip Cord	Nylon
	Color	Gray
Conductor(CAT6)	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.57+/-0.005mm
Insulation	Material	HDPE
	Min.Thickness	0.200mm
	AVG.Thickness	0.220mm
	Diameter	1.02+/-0.10mm
	Colors	Blue- White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	6.20+/-0.20mm
	Rip Cord	Nylon
	Colors	Blue,White

Conductor(RG6)	Material	Solid Bare Copper
	Size	18AWG X 1C
	Construction	1/1.02+/-0.004mm
Insulation	Material	FPE
	Min.Thickness	1.60mm
	AVG.Thickness	1.79mm
	Diameter	4.57+/-0.10mm
	Colors	Natural
Shield	Bonded AL-FOIL	Yes
	Braiding-1(0.12+0.005AL wire)	Coverage>60%
	Double AL-Foil	Yes
Jacket	Braiding-2(0.12+0.005AL wire)	Coverage>40%
	Material	PVC
	Min.Thickness	0.75mm
Assembly(2CAT6+1CAT5E+2RG6/U)	AVG.Thickness	0.84mm
	Diameter	7.25+/-0.20mm
	Colors	Black,White
	Jacket	Material
Min.Thickness		0.75mm
AVG.Thickness		0.90mm
Diameter		19.5+/-0.20mm
Rip Cord		Nylon
Colors		Blue
Bend Radius	Min 20D /390mm	

Marking:

STRUCTURED CABLE PRODUCTS --- HNC-9 --- E198134 SCP3 (UL) C(UL) CM 2x CAT6 550MHz 23AWG UTP + 1x CAT5E 350MHz 24AWG UTP + 2x RG6/U QUAD SHIELD COAX BC (BUNDLED) EN50575:2014 CE Eca PVC JKT RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
55.4kgs/122.1361lbs	550x420x250	500ft/Spool	8

Electrical & Physical Characteristics (CAT5E)

Operating Temperature Range		- 20°C + 70°C	
Conductor Resistance		Max 93.8 ohm/km at 20°C	
Dielectric Strength		Min AC1.5KV	
Insulation	Unaged	Tensile Strenght	12.3Mpa
		Elongation	150%
	Aged	Tensile Strenght	9.8Mpa(100°C 168h)
		Elongation	100%(100°C 168h)
Jacket	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Rated Voltage		Max 300Volts	
DC Resisance Unbalance		Max 5%	
Pair-to-Ground Capacitance Unbalance		Max 330pF/100m	
Nominal Velocity of Propagation(%)		66	
Delay Skew		Max 45ns/100m	

Electrical & Physical Characteristics (CAT6)

Operating Temperature Range		- 20°C +70°C	
Conductor Resistance		Max 72.2ohm/km at 20°C	
Dielectric Strength		Min AC1.5KV	
Spark Test		5.0KV	
Insulation	Unaged	Tensile Strenght	12.3Mpa
		Elongation	150%
	Aged	Tensile Strenght	9.8Mpa(100°C 168h)
		Elongation	100%(100°C 168h)
Jacket	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Rated Voltage		Max 300Volts	
DC Resisance Unbalance		Max 5%	
Pair-to-Ground Capacitance Unbalance		Max 330pF/100m	
Nominal Velocity of Propagation(%)		66	
Delay Skew		Max 45ns/100m	

Electrical & Physical Characteristics (RG6)

Operating Temperature Range		- 20°C + 70°C	
Conductor Resistance		Max 25 ohm/km at 20°C	
Dielectric Strength		Min AC2.0 KV	
Jacket	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)

Performance-1 (CAT5E)

ITEM Frequency	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	2	2	65.3	80	62.3	79	63.3	78
4	4.1	3.7	56.3	67.1	53.3	65.7	52.2	63.4
8	5.8	5.2	51.8	65.5	48.8	62.5	46	60.3
10	6.5	5.9	50.3	62.1	47.3	59.7	43.8	56.2
16	8.2	7.4	47.2	57.9	44.2	56.3	39	50.5
20	9.3	8.2	45.8	57.6	42.8	54.7	36.5	49.4
25	10.4	9.2	44.3	54.3	41.3	51.7	33.9	45.1
31.25	11.7	10.3	42.9	54.7	39.9	52	31.2	44.4
62.5	17	14.6	38.4	49.4	35.4	46.7	21.4	34.8
100	22	18.6	35.3	42.5	32.3	41.7	23.3	23.9
155	28.1	22.9	32.4	48.8	29.4	45.7	4.3	25.9
200	32.4	25.7	30.8	42.3	27.8	38.9	---	---
300	41	31.6	28.1	39.7	25.1	35.8	---	---
350	44.9	34.3	27.1	44	24.1	34.2	---	---

Performance-2 (CAT5E)

ITEM Frequency	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	20	24.1	63.8	76.2	60.8	73.2	60.3	77
4	23	25.2	51.8	61.2	48.8	59.5	49.2	62
8	24.5	25.7	45.7	52.2	42.7	51.5	43	57.3
10	25	27.1	43.8	50.8	40.8	50.5	40.8	53.8
16	25	26.2	39.7	47.7	36.7	45.5	36	48.9
20	25	26.1	37.8	47.9	34.8	46.4	33.5	46.5
25	24.3	26.4	35.8	48.7	32.8	45.9	30.9	42.5
31.25	23.6	24.6	33.9	43.9	30.9	41.1	28.2	41.7
62.5	21.5	24	27.8	34.4	24.8	34	18.4	32.1
100	20.1	22.8	23.8	29	20.8	27.9	10.3	23.1
155	18.8	26.5	20	33.6	17	26.3	1.3	22.8
200	18	28.1	1.7	27.8	14.7	23.2	---	---
300	16.8	26.3	14.2	35.7	11.2	23.9	---	---
350	16.3	28.5	12.9	31.6	9.9	21.3	---	---

Performance-1 (CAT6)

ITEM Frequency	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	2	1.9	74.3	80.3	72.3	76.6	72.3	78.4
4	3.8	3.7	65.3	75.6	63.3	74.2	61.5	71.9
8	5.3	5.1	60.8	66	58.8	65.1	55.5	60.9
10	6	5.8	59.3	67.6	57.3	65.9	53.3	61.8
16	7.6	7.4	56.2	70.8	54.2	67.2	48.6	63.4
20	8.5	8.2	54.8	71.9	52.8	69.1	46.3	63.7
25	9.5	9.1	53.3	62.3	51.3	60.8	43.8	53.2
31.25	10.7	9.9	51.9	68.7	49.9	67.1	41.2	58.8
62.5	15.4	15	47.4	59.6	45.4	58.3	32	44.6
100	19.8	18.8	44.3	60	42.3	58	24.5	41.2
200	29	27.4	39.8	57.5	37.8	56	10.8	30.1
250	32.8	29.4	38.3	55.8	36.3	54.1	5.5	26.4
300	36.4	33.3	37.1	54.2	35.1	53.4	0.7	20.9
400	43	38.6	35.3	53.8	33.3	52.1	---	---
500	48.9	43.9	33.8	51	31.8	49.3	---	---

Performance-2 (CAT6)

ITEM Frequency	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	20	23.6	67.8	75.6	64.8	73.3	70.3	74.7
4	23	23.9	55.8	61.3	52.8	60.1	59.5	70.5
8	24.5	30	49.7	55.7	46.7	54.8	53.5	60
10	25	28.5	47.8	55.2	44.8	53.2	51.3	60.1
16	25	28.2	43.7	49.7	40.7	48.1	46.6	59.8
20	25	27.8	41.8	48.1	38.8	46.2	44.3	60.9
25	24.3	27.5	39.8	45.9	36.8	45	41.8	51.7
31.25	23.6	24.9	37.9	42.7	34.9	41.7	39.2	57.2
62.5	21.5	24.1	31.9	39.4	28.9	37.4	30	43.3
100	20.1	23.5	27.8	35	24.8	33.2	22.5	39.2
200	18	23.2	21.8	32.8	18.8	30.2	8.8	28.6
250	17.3	21.5	19.8	30.7	16.8	27.7	3.5	24.7
300	16.8	20.8	18.3	26.5	15.3	25.4	---	---
400	15.9	18.9	15.8	23.4	12.8	22.1	---	---
500	15.2	18.6	13.8	19.5	10.8	18.7	---	---

Performance (RG6)

ITEM Frequency	Attention MAX DB/100M
5	1.9
50	5.25
200	10.5
400	14.11
700	18.5
1000	22.97
1200	25.5
1800	32
2200	36
2500	39
3000	44.5