

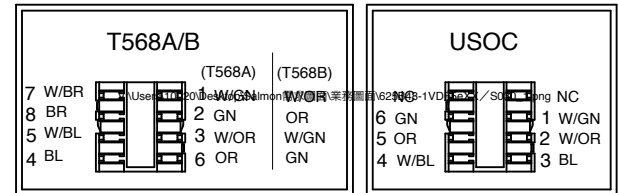
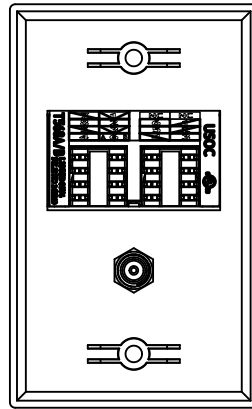
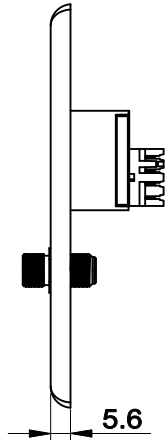
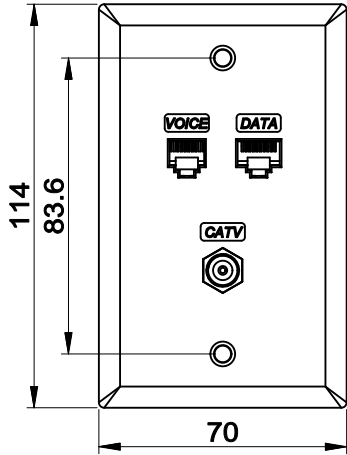


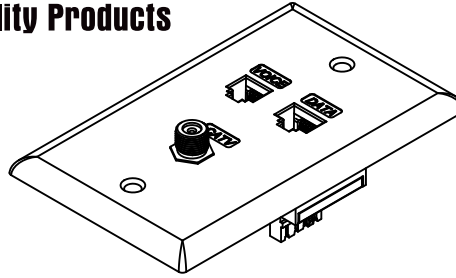

Structured Cable Products

Quality Installations Deserve Quality Products

PRODUCTION



ACCORDING TO : ANSI/TIA-568-C.2
ISO/IEC 11801 2nd Edition
IEC 60603-7

MATERIAL

FACEPLATE : ABS,UL94V-0.
JACK CONTACTS : PHOSPHOR BRONZE,50U" GOLD PAINTING.
IDC PLASTIC : ABS,UL94V-0.
IDC TERMINALS : PHOSPHOR BRONZE,NICKEL PLATED.

PHYSICAL CHARACTERISTICS

SUITABLE IMPACT TOOL : 110 STYLE PUNCH DOWN TOOL.
SURFACE FINISH : OR TEXTURE.
INSERTION LIFE : 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.
CONTACT FORCE : 100 GRAMS WITH FCC COMPLIANT 8P PLUG.
PLUG RETENTION FORCE : 11 LBF MIN.
DURABILITY : 200 TERMINATION CYCLES.
CONTACT COMPATIBILITY : ACCOMMODATES 22 TO 24 AWG SOLID.
OPERATING TEMPERATURE RANGE : -10 °C TO 80 °C.
STORAGE TEMPERATURE RANGE : -40 °C TO 68 °C.
HUMIDITY : 10%~90%RH.


ELECTRICAL

INSULATION RESISTANCE : 500 MΩ.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC.
DC CURRENT RATING : 1.5 Amps.
DC RESISTANCE : 0.1Ω.
CONTACT RESISTANCE : 20mΩ.



NOTE

- WILL NOT SUPPORT CHANNEL SHORTER THAN 15M.
- ONLY ACCEPT RJ-45 8P8C PLUG.

ENCLOSURE PARTS:



K4 6 X 25mm SCREW X 2



CAP X 2

ENCLOSURE

IDC CAP X 1 PC
SCREW X 2 PCS
INSTRUCTION X 1 PC

Cat 5e

56Y4
E145249



LISTED
COMMUNICATION
CIRCUIT ACCESSORIES

Scale	1:2	All Copy Rights Reserved	
3rd Angle Projection		REV DATE 9-27-2013	JENNIFER
Unit	mm	SCP PART #	
Date	2013/8/15	123-WT	
Tolerance			
~20	~50	~150	150~
±0.2	±0.4	±0.5	±1.5
ANGLE			
±2°		Drawn by	Checked by
±2°		BORUEI	