




Structured Cable Products®

Quality Installations Deserve Quality Products

www.spcat5e.com
 sales@scpcat5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: 14/2SP-41-YL-1000 UPC: 810070014933

DESCRIPTION:
 2C/14 AWG 41 STRAND SPEAKER CABLE, PVC JKT- YELLOW- 1000 FT SPOOL

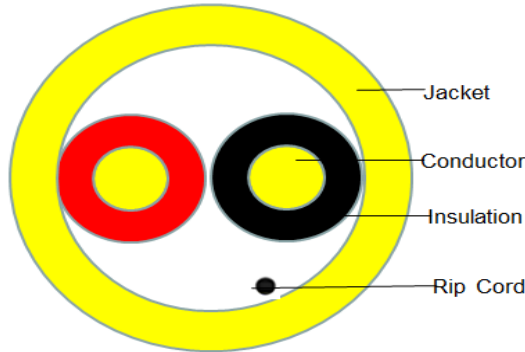

Regulatory

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)
 EU RoHS 2011/65/EU Compliant
 EN50575: 2014 REACTION TO FIRE CLASS Dca

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	14AWG X 2C(2.11mm ²)
	Construction	41/0.254mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	2.60mm +/-0.10mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.50mm
	AVG.Thickness	0.60mm
	Diameter	6.4mm +/-0.20mm
	Rip Cord	Nylon
	Color	Yellow
Bend radius	Min 15D/95mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 9.2ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	300V
Test Voltage	800V/min

Marking:

STRUCTURED CABLE PRODUCTS -- 14/2SP-41 -- E198137 SCP3 (UL) CL3 C(UL) CMR 2C
 14AWG 41 STRAND OXYGEN FREE COPPER - EN50575:2014 CE Dca PVC JKT FT4 75C RoHS
 ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
10.8kgs/23.810lbs	320X260X320	500FT/BOX	36/48
21.8kgs/48.060lbs	360X200X160	1000FT/SPOOL	36