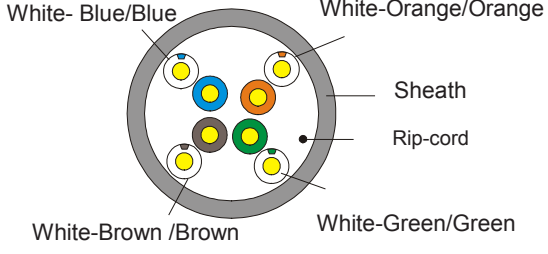


**SCP PART#: CAT5E-P-GN**

CAT5E PLENUM UTP- 350 MHz 24 AWG SOLID BC 4PR, ANSI/TIA 568.2-D, ISO/IEC 11801 CLASS D, UL CMP- GREEN - 1000 FT BOX

Content of the Data Sheet																																																																															
Sheath Printing	STRUCTURED CABLE PRODUCTS P/N CAT5E-P -CAT5E ENHANCED 350 MHz UTP VERIFIED TO ANSI/TIA-568.2-D E198134 -Z (UL) CMP 4PR 24AWG 75C---EU RoHS EC **** FEET MM/YY																																																																														
Category	U/UTP CAT5E-4P-CMP PVC																																																																														
Test Standard	ISO/IEC11801 ANSI/TIA 568.2-D YD/T1019																																																																														
Conductor	Material	Solid-Bare Copper																																																																													
	Nom.O.D.(mm)	0.500	up	+0.01																																																																											
			down	-0.01																																																																											
Insulation	Material	FEP																																																																													
	Diameter	0.85±0.03mm																																																																													
Sheath	Thickness	0.40±0.05 mm																																																																													
	External O.D.	4.8±0.4 mm																																																																													
	Surface	Clean,Frap,Satiation																																																																													
	Material	CMP PVC(complies RoHS)																																																																													
	Color	According to the requires																																																																													
Surface Printing	Letter height	3.0±0.3mm																																																																													
	Color	Black																																																																													
	Print error & Space	≤±0.5%, 1m																																																																													
Core Color	1 White- Blue /Blue	2 White-Orange /Orange																																																																													
	3 White- Green /Green	4 White- Brown /Brown																																																																													
Packing	Box 305m, 45 boxes each pallet																																																																														
Weight :	N.W 9.40KGS/ G.W 11.80KGS																																																																														
Packing length	(305±1.5)m																																																																														
Rip-cord	Yes	Drain wire	No																																																																												
Sheath Physical Properties	Before Aging Tensile Strength (Mpa)	≥13.5																																																																													
	Elongation(%)	≥150																																																																													
	Aging Period( °C×hrs)	100°C×2																																																																													
	After Aging Tensile Strength(Mpa)	≥12.5																																																																													
	Elongation(%)	≥125																																																																													
	Cold bend(-20±2°C×4h)	8× Cable O.D	No visible cracks																																																																												
Electrical Characteristics (20 °C)	1.0-100.0MHz Impedance(Ω)	100±15																																																																													
	1.0-100.0MHz Delay Skew (ns/100m)	≤45																																																																													
	Velocity of Propagation (%) (NVP)	74																																																																													
	DC ResistanceΩ/100m) max	9.5																																																																													
	DC Conductor Resistance Unbalance(%) max	5.0																																																																													
																																																																															
Technical Performance :																																																																															
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>RL ≥dB</th> <th>ATT ≤dB</th> <th>NEXT ≥dB</th> <th>Phase DELAY ≤ns</th> </tr> </thead> <tbody> <tr><td>1</td><td>20.0</td><td>2.0</td><td>65.3</td><td>570.00</td></tr> <tr><td>4.0</td><td>23.0</td><td>4.1</td><td>56.3</td><td>552.00</td></tr> <tr><td>8.0</td><td>24.5</td><td>5.8</td><td>51.8</td><td>546.73</td></tr> <tr><td>10.0</td><td>25.0</td><td>6.5</td><td>50.3</td><td>545.38</td></tr> <tr><td>16.0</td><td>25.0</td><td>8.2</td><td>47.2</td><td>543.00</td></tr> <tr><td>20.0</td><td>25.0</td><td>9.3</td><td>45.8</td><td>542.05</td></tr> <tr><td>25.0</td><td>24.3</td><td>10.4</td><td>44.3</td><td>541.20</td></tr> <tr><td>31.25</td><td>23.6</td><td>11.7</td><td>42.9</td><td>540.44</td></tr> <tr><td>62.5</td><td>21.5</td><td>17.0</td><td>38.4</td><td>538.55</td></tr> <tr><td>100</td><td>20.1</td><td>22.0</td><td>35.3</td><td>537.60</td></tr> <tr><td>*155</td><td>18.0</td><td>28.1</td><td>32.4</td><td>536.90</td></tr> <tr><td>*200</td><td>17.4</td><td>32.4</td><td>30.8</td><td>536.50</td></tr> <tr><td>*300</td><td>16.5</td><td>41.8</td><td>29.3</td><td>536.10</td></tr> <tr><td>*350</td><td>16.0</td><td>44.9</td><td>27.1</td><td>535.90</td></tr> </tbody> </table>					Frequency (MHz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns	1	20.0	2.0	65.3	570.00	4.0	23.0	4.1	56.3	552.00	8.0	24.5	5.8	51.8	546.73	10.0	25.0	6.5	50.3	545.38	16.0	25.0	8.2	47.2	543.00	20.0	25.0	9.3	45.8	542.05	25.0	24.3	10.4	44.3	541.20	31.25	23.6	11.7	42.9	540.44	62.5	21.5	17.0	38.4	538.55	100	20.1	22.0	35.3	537.60	*155	18.0	28.1	32.4	536.90	*200	17.4	32.4	30.8	536.50	*300	16.5	41.8	29.3	536.10	*350	16.0	44.9	27.1	535.90
Frequency (MHz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns																																																																											
1	20.0	2.0	65.3	570.00																																																																											
4.0	23.0	4.1	56.3	552.00																																																																											
8.0	24.5	5.8	51.8	546.73																																																																											
10.0	25.0	6.5	50.3	545.38																																																																											
16.0	25.0	8.2	47.2	543.00																																																																											
20.0	25.0	9.3	45.8	542.05																																																																											
25.0	24.3	10.4	44.3	541.20																																																																											
31.25	23.6	11.7	42.9	540.44																																																																											
62.5	21.5	17.0	38.4	538.55																																																																											
100	20.1	22.0	35.3	537.60																																																																											
*155	18.0	28.1	32.4	536.90																																																																											
*200	17.4	32.4	30.8	536.50																																																																											
*300	16.5	41.8	29.3	536.10																																																																											
*350	16.0	44.9	27.1	535.90																																																																											
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>PSNEXT ≥dB</th> <th>ELFEXT ≥dB</th> <th>PSELFEXT ≥dB</th> </tr> </thead> <tbody> <tr><td>1</td><td>62.3</td><td>63.8</td><td>60.8</td></tr> <tr><td>4</td><td>53.3</td><td>51.8</td><td>48.8</td></tr> <tr><td>8</td><td>48.8</td><td>45.7</td><td>42.7</td></tr> <tr><td>10</td><td>47.3</td><td>43.8</td><td>40.8</td></tr> <tr><td>16</td><td>44.4</td><td>39.7</td><td>36.7</td></tr> <tr><td>20</td><td>42.8</td><td>37.8</td><td>34.8</td></tr> <tr><td>25</td><td>41.3</td><td>35.8</td><td>32.8</td></tr> <tr><td>31.25</td><td>39.9</td><td>33.9</td><td>30.9</td></tr> <tr><td>62.5</td><td>35.4</td><td>27.9</td><td>24.9</td></tr> <tr><td>100</td><td>32.3</td><td>23.8</td><td>20.8</td></tr> <tr><td>*155</td><td>29.4</td><td>20.0</td><td>17.0</td></tr> <tr><td>*200</td><td>27.8</td><td>17.8</td><td>14.8</td></tr> <tr><td>*300</td><td>26.3</td><td>14.3</td><td>11.3</td></tr> <tr><td>*350</td><td>24.1</td><td>12.9</td><td>9.9</td></tr> </tbody> </table>					Frequency (MHz)	PSNEXT ≥dB	ELFEXT ≥dB	PSELFEXT ≥dB	1	62.3	63.8	60.8	4	53.3	51.8	48.8	8	48.8	45.7	42.7	10	47.3	43.8	40.8	16	44.4	39.7	36.7	20	42.8	37.8	34.8	25	41.3	35.8	32.8	31.25	39.9	33.9	30.9	62.5	35.4	27.9	24.9	100	32.3	23.8	20.8	*155	29.4	20.0	17.0	*200	27.8	17.8	14.8	*300	26.3	14.3	11.3	*350	24.1	12.9	9.9															
Frequency (MHz)	PSNEXT ≥dB	ELFEXT ≥dB	PSELFEXT ≥dB																																																																												
1	62.3	63.8	60.8																																																																												
4	53.3	51.8	48.8																																																																												
8	48.8	45.7	42.7																																																																												
10	47.3	43.8	40.8																																																																												
16	44.4	39.7	36.7																																																																												
20	42.8	37.8	34.8																																																																												
25	41.3	35.8	32.8																																																																												
31.25	39.9	33.9	30.9																																																																												
62.5	35.4	27.9	24.9																																																																												
100	32.3	23.8	20.8																																																																												
*155	29.4	20.0	17.0																																																																												
*200	27.8	17.8	14.8																																																																												
*300	26.3	14.3	11.3																																																																												
*350	24.1	12.9	9.9																																																																												
Remarks: * are the reference values																																																																															