

SCP PART#: H-16/4OFC-OR-D

Description:


Dca RATED PREMIUM SPEAKER CABLE -
 4C/16 AWG 65 STRAND OXYGEN FREE COPPER, UL CMR,
 EN50575 Dca-s3,d2,a3 HD PVC JKT- ORANGE
 500FT/152M BOX

Regulatory:

UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)
 EU RoHS 2011/65/EU Compliant
 EN50575 REACTION TO FIRE CLASS Dca-s3,d2,a3

Application:

Speaker Cable

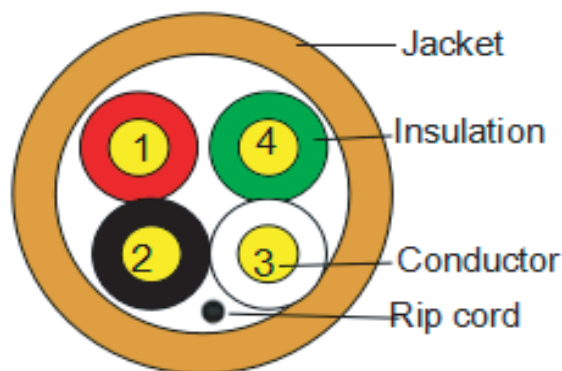

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	16AWG X 4C(1.31mm ²)
	Construction	65/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.30mm
	AVG.Thickness	0.33mm
	Diameter	2.0mm +/-0.10mm
	Colors	Black, Red, White, Green
Jacket	Material	PVC
	Min.Thickness	0.80mm
	AVG.Thickness	0.95mm
	Diameter	7.0mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius		Min 15D/105mm

Electrical & Physical Characteristics:

Operating Temperature Range		- 20°C + 75°C	
Conductor Resistance		Max 15.5ohm/km at 20°C	
Insulation Resistance		Min 50MΩ*km at 20°C	
Dielectric Strength		Min AC1.5KV	
Rated Voltage		Max 300Volts	
Insulation	Unaged	Tensile Strength	13.8Mpa
		Elongation	100%
	Aged	Tensile Strength	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Jacket	Unaged	Tensile Strength	13.8Mpa
		Elongation	100%
	Aged	Tensile Strength	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)

Marking:

STRUCTURED CABLE PRODUCTS --- H-16/4OFC --- E198137 SCP3 (UL) CL3 C(UL) CMR 4C 16AWG 65 STRAND OXYGEN FREE COPPER - EN50575:2014 CE Dca PVC JKT FT4 75C RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***FEET

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
11.8kgs/26.014lbs	320x260x320	152m/500ft Box	36