




SCP PART#: LUT-RED UPC: 810070018139

DESCRIPTION:

4C/18 AWG SHIELDED W/DRAIN + 2C/16 AWG + 1C/18 AWG, UL CM PVC JKT (Compare to Lutron SVQ-CBL)
 - BLUE W/RED STRIPE- 500FT/152M SPOOL

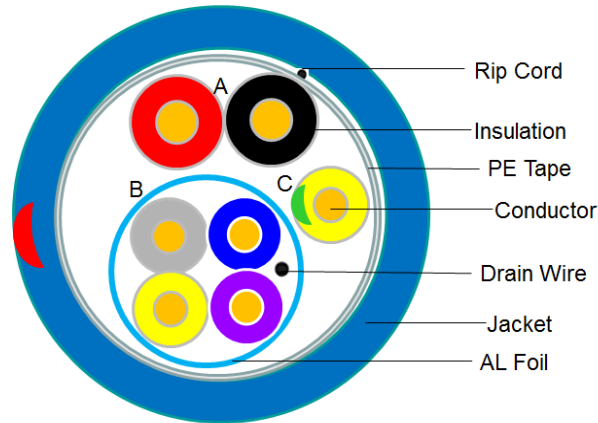

Standard: UL 444 & UL 13, Type (UL) CM,CMG/CL2 c(UL)
 EU RoHS 2011/65/EU Compliant
 EN50575: 2014 REACTION TO FIRE CLASS Eca

Construction Characteristics:

Conductor A	Material	Stranded Bare Copper
	Size	16AWG X 2C
	Construction	7/0.50+/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.38mm
	AVG.Thickness	0.40mm
	Diameter	2.25+/-0.1mm
	Colors	Black & Red
Conductor B	Material	Stranded Bare Copper
	Size	18AWG X 4C
	Construction	7/0.40+/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.40mm
	AVG.Thickness	0.42mm
	Diameter	1.96+/-0.1mm
	Colors	Blue & Gray & Yellow & Purple
Shield	Drain wire(TC)	7/0.32+/-0.004mm
	Shield	AL Foil
Conductor C	Material	Stranded Bare Copper
	Size	18AWG X 1C
	Construction	7/0.40+/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.40mm
	AVG.Thickness	0.42mm
	Diameter	1.96+/-0.1mm
	Colors	Yellow w/Green stripe



Structured Cable Products®

Quality Installations Deserve Quality Products

www.spcat5e.com
 sales@scpat5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: LUT-RED UPC: 810070018139

DESCRIPTION:

4C/18 AWG SHIELDED W/DRAIN + 2C/16 AWG + 1C/18 AWG, UL CM PVC JKT (Compare to Lutron SVQ-CBL) - BLUE W/RED STRIPE- 500FT/152M SPOOL

Assembly(A+B+C)	Core wrap	PE Tape
Jacket	Material	PVC
	Min.Thickness	0.70mm
	AVG.Thickness	0.80mm
	Diameter	8.65+/-0.20mm
	Rip Cord	Nylon
	Color	Blue w/Red Stripe
Bend radius	Min 20D/175mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance(18AWG)	Max 22.8ohm/km at 20°C
Conductor Resistance(16AWG)	Max 15.5 ohm/km at 20°C
18AWG Core/Core Capacitance	120+30pf/m
18AWG Core/Screen Capacitance	
16AWG Core/Core Capacitance	130+30pf/m
Rated Voltage	Max 300Volts
Dielectric Strength	Min AC1.5KV

Marking:

STRUCTURED CABLE PRODUCTS --- LUT-RED --- E198137 SCP3 (UL) CL2 C(UL) CM
 4C/18AWG STR SHIELDED W/DRAIN + 2C/16AWG STR + 1C/18AWG STR EN50575:2014 CE
 Eca PVC JKT RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***FEET

Packaging:

Approx.Wight(kg)	Approx.Dimension(mm)	Package	Packages per pallet
20kgs/44.09lbs	360X200X160	500ft/Spool	36

*Lutron®, Homeworks®, Sivoia®, Grafik Eye®, and Quantum Systems® are registered trademarks of Lutron Electronics Co., Inc. Structured Cable Products Inc. is not aliated with Lutron and our products are not endorsed or certied by Lutron.