




**SCP Part Number: RG6/U-BC-WT-5**

REV.A

**Cross Section**

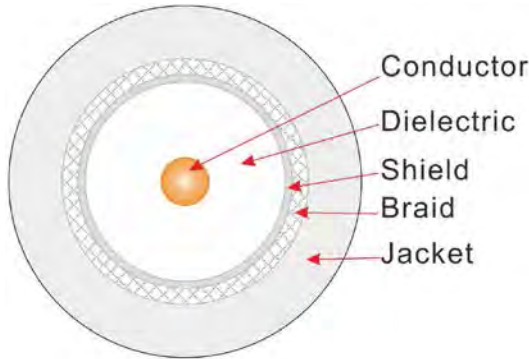

**Performance**

**Electrical Characteristics:[@68°F.(20°C.)]**

Frequency (MHz)	Attenuation (dB/100m)	Attenuation (dB/100m)
5	0.52	1.70
10	0.72	2.33
50	1.47	4.79
100	2.05	6.72
200	2.84	9.28
400	4.06	13.28
700	5.60	18.36
900	6.24	20.43
1000	6.60	21.61
1200	7.50	24.59
1450	8.04	26.36
1800	8.84	28.98
2200	9.77	32.03
2500	11.13	36.47
2750	11.58	37.94
3000	12.06	39.54

**Description**

RG6/U CATV 3.0 GHz 18 AWG BC 60% AL BRAID-WHITE - 500 FT BOX

**Marking**

STRUCTURED CABLE PRODUCTS Exxxxxx (UL) OR C(UL) CM  
18 AWG BC 75C MM/YY -- P/N: RG6/U-BC -- RG6/U COAX  
3.0GHz CATV 60% AL BRAID CE EU RoHS EC ZONE/DEVICE  
A B C D E 0 1 2 3 4 5 6 7 8 9 xxxxFEET

**Construction**

<b>Center Conductor:</b>	<b>Bare Copper</b>
Size	18AWG
Dia.(in/mm)	0.0403/1.02
<b>Insulate</b>	<b>Skin Foam PE</b>
Nom. Thickness(in/mm)	0.070/1.78
Insulation Dia.(in/mm)	0.0180/4.57
<b>Shield</b>	<b>Bonded Aluminum Foil</b>
Coverage Area (%)	100
<b>Braid Shield</b>	<b>Aluminum Wire</b>
Coverage Area(%)	60
<b>Jacket</b>	<b>White FR-PVC</b>
Nom. Thickness(in/mm)	0.030/0.76
Min. Thickness(in/mm)	0.024/0.61
Cable Dia.(in/mm)	0.272/6.91
<b>Packing</b>	<b>Pull Box</b>
Length(ft/m)	1000/305
Gross Weight(lbs/kg)	29.98/13.6

Dielectric Strength (kV/min)	1
Impedence (ohms)	75±3.0
SRL (dB)	5~1000MHz >=20 1001~3000MHz >=15
Capacitance (pF/ft)	16.2
Conductor DCR@ 20°C (ohms/kft)	6.55
DC Loop Resistance@ 20°C (ohms/kft)	19.98
Velocity Of Propagation (%)	85

**Mechanical Characteristics:**

Test Object:	Jacket
Test Material	
Before	Tensile strength (psi) 2000
Aging	Elongation (%) 200
Aging Condition	(°C_hrs) 100_168
After	Tensile strength (%) >=85%unaged
Aging	Elongation (%) >=50%unaged
Cold Bend	(-20±2°C/4hrs) No Crack
Jacket Longitudinal Shrinkage	(%) >=5
Center Conductor break Strength	(lbs) 85
Operating Temperature Range	(°C) -20~75

**Standards**

UL, CE, RoHS