




SCP PART#: VANTAGE-16/2

UPC: 817777010169

2C/16 AWG 65 STRAND VANTAGE CONTROL CABLE, RATED 600v, PVC JKT- PURPLE w/YELLOW STRIPE- 1000 FT SPOOL

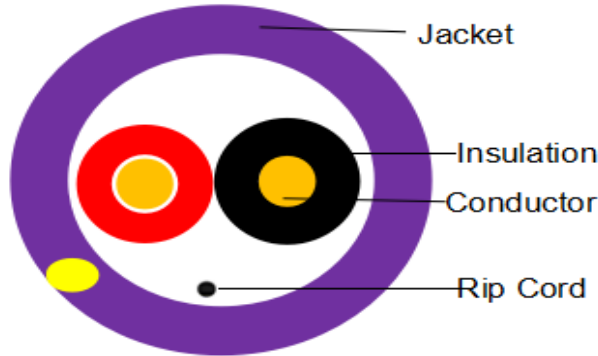

Regulatory

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)
EU RoHS 2011/65/EU Compliant
EN50575: 2014 REACTION TO FIRE CLASS Eca

Application: Speaker cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	16AWG X 2C(2.11mm ²)
	Construction	65/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.70mm
	AVG.Thickness	0.78mm
	Diameter	3.05mm +/-0.10mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.86mm
	AVG.Thickness	0.95mm
	Diameter	8.0mm +/-0.20mm
	Rip Cord	Nylon
	Color	Purple with yellow stripe
Bend radius	Min 15D/120mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
-----------------------------	---------------



Structured Cable Products™

Quality Installations Deserve Quality Products

www.scpcat5e.com
 sales@scpcat5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: VANTAGE-16/2

UPC: 817777010169

**2C/16 AWG 65 STRAND VANTAGE CONTROL CABLE, RATED 600v, PVC JKT- PURPLE w/YEL-
 LOW STRIPE- 1000 FT SPOOL**

- page 2 -

Test Voltage	1000V/min		
Conductor Resistance	Max 15.5 ohm/km at 20°C		
Insulation Resistance	Min 50MΩ*km at 20°C		
Dielectric Strength	Min AC2.5KV		
Marking:			
STRUCTURED CABLE PRODUCTS --- VANTAGE-16/2 --- 2C 16AWG 65 STRAND OXYGEN FREE COPPER FT4 75C 600V - EN50575:2014 CE Eca RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***FEET			
Packaging:			
Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
22.5kgs/49.604lbs	380X290X200	1000ft/Spool	27