

Premium Speaker Cable Round HD Jacket Indoor/Outdoor Rated - 12AWG

Key Features


- Oxygen-Free Copper Conductors
- Round HD Jacket for Superior Flexibility
- Twisted Pair
- High Strand Count for Minimal Distortion
- Riser Rated: UL CMR FT4 Rated
- UV Protected for Seamless Indoor/Outdoor Installs
- Reel-in-Box or Wooden Spool
- CPR EuroClass: Dca
- Limited Lifetime Warranty
- RoHS, REACH, CE

Description

Pro-Grade HD Speaker Cable, Indoor/Outdoor Rated - 2 or 4 Conductor, Insulated, Twisted, Unshielded, 12AWG 65 Strand Oxygen-Free Copper, Riser Rated UL CMR cUL FT4, UV Sun Resistant HD PVC Jacket, Reel-in-Box or Wooden Spool. EU Warehouse version CPR Compliant EuroClass: Dca-s3,d2,a3

Applications

Speaker Level Audio for Commercial and Residential, Home Theater, Permanent and Semi-Permanent Installations, In-Wall Riser, Outdoor with UV Protected PVC Jacket.

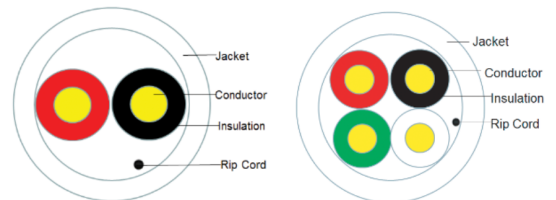

Construction

Conductor	Material	Oxygen-Free Bare Copper	Rip Cord	Yes, Nylon	
	Solid/Stranded	Stranded(65/0.254mm +/-0.004mm)			
	Size	12 AWG			
	Insulation Material	PVC			
	Insulation OD Avg.	0.36mm			
	Color Code	Pr1: Black, Red; Pr2: Green, White			
	Twisted Pair	2 Cores to Pair			
	Insulated Conductor OD	3.2mm +/-0.10mm			
	Lay Length	40mm			
Shielding/Screen	Twists per foot/meter	25 /meter	Jacket/Sheath	Material	PVC - UV Sun Res
				Nominal Jacket Thickness	0.95mm
Shielding/Screen	Type	Unshielded	Overall Cable Diameter (OD)	Color Code	Per Request
	Material	na		1pair: 8.3 +/-0.2mm;	
				2pair: 9.8 +/-0.2mm	

Mechanical Properties

Bend Radius	Min Bend Radius (Installation)	1pair: 66.4mm; 2pair: 78.4mm
	Min Bend Radius (Operation)	1pair: 66.4mm; 2pair: 78.4mm
Insulation Tensile Strength	Unaged / Elongation %	13.8Mpa / 100%
	Aged / Elongation %	11.7Mpa / 50%
Jacket/Screen Tensile Strength	Unaged / Elongation %	13.8Mpa / 100%
	Aged / Elongation %	11.7Mpa / 50%
Cable Cold Bend (-20°C for 4 hrs)	No Crack	

Standards Reference

Manufactured in Accordance to: UL 444, UL 13, NEC Article 725, RoHS, REACH, CE

North America Installation Rating: Riser Type UL CMR cUL FT4 ; NEC Type CL3R/CL2R 75°C

EU (EMEA) Installation Rating: EN50575 EuroClass Dca-s3,d2,a3

Environmental Compliance

RoHS Compliant: RoHS II/III, EU/UK RoHS
REACH, WEEE Directive, WFD:2023, SCIP:2023, POPs (EU) No 2019/1021



Electrical Characteristics

DC Resistance (at 20°C)	Max 5.6 ohm/km	Maximum Current (25°C)	19.5A
Insulation Resistance (at 20°C)	Min 50M ohm/km	Rated Voltage	Insulated - 300V
Mutual Capacitance	1pair: 95pF/m; 2pair: 105pF/m		Operating Low Voltage - 80V
Impedance	77+/-5 OHM	Test Voltage Between Conductors	2.5kv/2s
Inductance	1pair: 0.013µH/m; 2pair: 0.013µH/m		

Environmental Parameters

Temperature Range - Operating	-20°C to 75°C (-4°F to 167°F)	Temperature Range - Storage	0°C to 40°C (32°F to 104°F)
Temperature Range - Installation	0°C to 40°C (32°F to 104°F)		

Part Numbers

Item No.	UPC	Jacket Color	Package Length	Package Type	Package Weight (lb/kg)	Item Dimensions (mm)
North America:						
12/20FC-HD-BK	810070016364	Black	500ft/152m	Reel-in-Box	41.8/19	310*340*350
12/20FC-HD-WT	810070017897	White	500ft/152m	Reel-in-Box	41.8/19	310*340*350
12/40FC-HD-BK	810093724246	Black	500ft/152m	Wood Spool	48.4/22	360*220*160
12/40FC-HD-WT	817777014655	White	500ft/152m	Wood Spool	48.4/22	360*220*160
Europe (EMEA):						
12/20FC-HD-BK-D	810070016364	Black	500ft/152m	Reel-in-Box	41.8/19	310*340*350
12/20FC-HD-WT-D	817777015539	White	500ft/152m	Reel-in-Box	41.8/19	310*340*350
12/40FC-HD-WT-D	817777015706	White	500ft/152m	Wood Spool	48.4/22	360*220*160

SCP has made every reasonable effort to ensure the accuracy of the information in this document. SCP reserves the right to modify or change information herein at any time without notice due error correction, specification changes, ongoing technical developments, and/or any reason. SCP disclaims all representations or warranties, whether express, statutory or implied regarding the information contained herein. Under no circumstance will SCP be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever. Dimensions and weights are for reference purposes only and are subject to change. Regulatory information is for guidance purposes only. All warranty information is available can be viewed at www.scp5e.com © 2025 Structured Cable Products (SCP). All rights reserved.