



Structured Cable Products


Quality Installations Deserve Quality Products

www.scpca5e.com

www.scpca5e.com

SCP PART#: 14/4SP-DBWBT-500

DESCRIPTION: DIRECT BURIAL SPEAKER CABLE W/WATER BLOCK TAPE-4C/14AWG 105 STRAND
OXYGEN FREE COPPER LLDPE JKT-BLACK-152M/500FT SPOOL

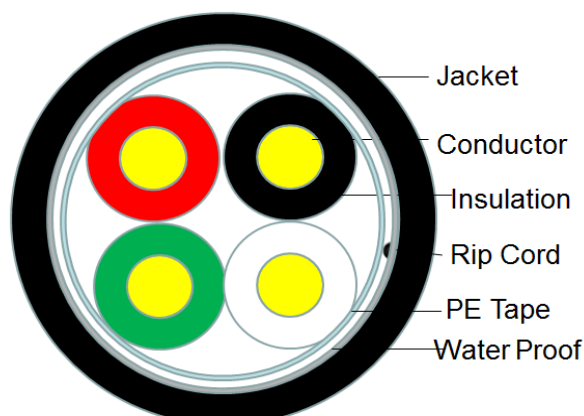

Standard:

EU RoHS 2011/65/EU Compliant

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	14AWG X 4C(2.11mm^2)
	Construction	105/0.160mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	2.7mm +/-0.05mm
Screen	Colors	Black & Red & White & Green
	Core wrap	PE Tape
	Filler	Water proof
Jacket	Material	LLDPE
	Min.Thickness	0.64mm
	AVG.Thickness	0.70mm
	Diameter	8.2+/-0.20mm
	Rip Cord	Nylon
Bend radius	Color	Black
	Min 15D/125mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance(14AWG)	Max 9.2ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	Max 80Volts

Marking:

STRUCTURED CABLE PRODUCTS --- 14/4SP-DBWBT --- 4C 14AWG 105 STRAND OFC DIRECT BURIAL
WATER BLOCK TAPE - LLDPE JKT - EU RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
19.8kgs/43.56lb:	360x200x160	500ft/Spool	36