

Standard Series Speaker Cable Indoor Rated - 14AWG

Key Features


- Oxygen-Free Copper Conductors
- High Strand Count for Minimal Distortion
- Riser Rated: ETL CMR FT4 Rated
- Tangle-Free Reelex II Box (Recyclable) or Wooden Spool
- Limited Lifetime Warranty
- RoHS, REACH, CE

Description

Standard Series Speaker Cable, Indoor Rated - 2 or 4 Conductor, Insulated, Unshielded, 14AWG 105 Strand Oxygen-Free Copper, Riser Rated ETL CMR cUL FT4, Reelex II Tangle Free Box or Wooden Spool.

Applications

Speaker Level Audio for Commercial and Residential, Home Theater, Permanent and Semi-Permanent Installations. In-wall riser PVC Jacket

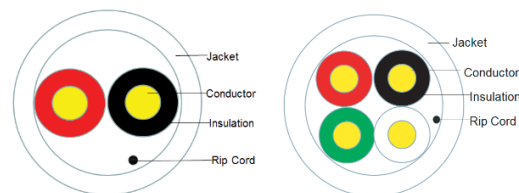

Construction

Conductor	Material	Oxygen-Free Bare Copper	Rip Cord	Yes, Nylon				
	Solid/Stranded	Stranded (105/0.15mm +/-0.004mm)		Drain Wire	none			
	Size	14AWG			Jacket/Sheath	Material	PVC	
	Insulation Material	PVC				Nominal Jacket Thickness	0.55mm +/-0.10mm	
	Insulation OD Avg.	0.36mm				Color Code	Per Request	
	Color Code	Pr1: Black, Red; Pr2: Green, White				Overall Cable Diameter (OD)	1pair: 6.40mm +/-0.2mm;	
	Twisted Pair	2 Cores to Pair					2pair: 7.50mm +/-0.2mm	
Insulated Conductor OD	2.7mm +/-0.10mm							
Lay Length	26mm							
Shielding/Screen	Type	Unshielded						
	Material	na						

Mechanical Properties

Bend Radius	Min Bend Radius (Installation)	1pair: 57.6mm; 2pair: 66.4mm
	Min Bend Radius (Operation)	1pair: 57.6mm; 2pair: 66.4mm
Insulation Tensile Strength	Unaged / Elongation %	13.8Mpa / 100%
	Aged / Elongation %	11.7Mpa / 50%
Jacket/Screen Tensile Strength	Unaged / Elongation %	13.8Mpa / 100%
	Aged / Elongation %	11.7Mpa / 50%
Cable Cold Bend (-20°C for 4 hrs)	No Crack	

Standards Reference

Manufactured in Accordance to: UL 444, UL 13, NEC Article 725, RoHS, REACH, CE
North America Installation Rating: Riser Type ETL CMR cETL FT4 ; NEC Type CL3R/CL2R 75°C
EU (EMEA) Installation Rating: EN50575 EuroClass Dca-s3,d2,a3

Environmental Compliance

RoHS Compliant: RoHS II/III, EU/UK RoHS
 REACH, WEEE Directive, WFD:2023, SCIP:2023, POPs (EU) No 2019/1021
 Reelex II – Made with recyclable materials

⚠️ California Prop 65 Warning – California Residents Only
 WARNING: This Product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information: www.P65Warnings.ca.gov

Rev. 0425ZH

Electrical Characteristics

DC Resistance (at 20°C)	Max 10.5 ohm/km	Maximum Current (25°C)	11A
Insulation Resistance (at 20°C)	Min 50M ohm/km	Rated Voltage	Insulated - 300V
Mutual Capacitance	1pair: 75pF/m ; 2pair: 90pF/m		Operating Low Voltage - 80V
Impedance	62+/-60HM	Test Voltage Between Conductors	2.5kv/2s
Inductance	1pair: 0.032μH/m; 2pair: 0.023μH/m		

Environmental Parameters

Temperature Range - Operating	-20°C to 75°C (-4°F to 167°F)	Temperature Range - Storage	0°C to 40°C (32°F to 104°F)
Temperature Range - Installation	0°C to 40°C (32°F to 104°F)		

Part Numbers

Item No.	UPC	Jacket Color	Package Length	Package Type	Package Weight (lb/kg)	Item Dimensions (mm)
North America:						
14/20FC-ETL-WT	810093728954	White	500ft/152m	Reellex II Box	23.18/10.54	350*260*350
14/40FC-ETL-WT	810093728961	White	500ft/152m	Spool	40.70/18.5	360*180*160
Europe (EMEA):						
Not available at this time						

SCP has made every reasonable effort to ensure the accuracy of the information in this document. SCP reserves the right to modify or change information herein at any time without notice due error correction, specification changes, ongoing technical developments, and/or any reason. SCP disclaims all representations or warranties, whether express, statutory or implied regarding the information contained herein. Under no circumstance will SCP be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever. Dimensions and weights are for reference purposes only and are subject to change. Regulatory information is for guidance purposes only. All warranty information is available can be viewed at www.scpca5e.com © 2025 Structured Cable Products (SCP). All rights reserved.