




**SCP PART#: 18/2COIL-WT**

DESCRIPTION : 2C/18AWG STRANDED BC,SECURITY/COMMERCIAL AUDIO,  
UL CMR,PVC JKT

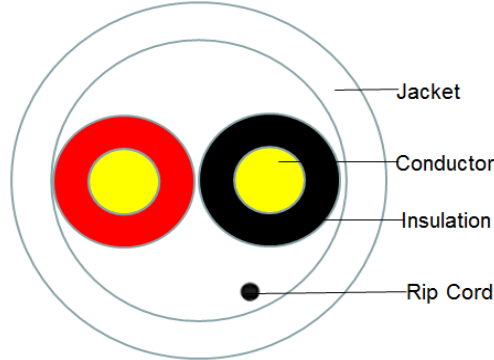

**Standard:** UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)

EU RoHS 2011/65/EU Compliant

EN50575: 2014 REACTION TO FIRE CLASS Eca

**Construction Characteristics:**

Conductor	Material	Bare Copper
	Size	18AWG X 2C
	Construction	16/0.25+/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.25mm
	AVG.Thickness	0.28mm
	Diameter	1.7+/-0.05mm
Jacket	Colors	Black & Red
	Material	PVC
	Min.Thickness	0.45mm
	AVG.Thickness	0.50mm
	Diameter	4.4+/-0.20mm
	Rip Cord	Nylon
	Color	White
Bend radius	Min 15D/66mm	

**Electrical & Physical Characteristics:**

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance(18AWG)	Max 25.5 ohm/km at 20°C
Dielectric Strength	Min AC1.5KV
Insulation Resistance	Min 50MΩ*km at 20°C
Rated Voltage	Max 300Volts

**Marking:**

STRUCTURED CABLE PRODUCTS --- 18/2COIL --- SECURITY CABLE UNSH 2C/18 AWG BC  
STRANDED-----E198134 SCP3 (UL)C(UL) CMR-----PVC JKT RoHS EC ZONE/DEVICE A B C  
D E 0 1 2 3 4 5 6 7 8 9 \*\*\*FEET DDMMYY

**Packaging:**

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
5.1kgs/11.243lbs	300*600*130	500ft/COIL	150