



Structured Cable Products


Quality Installations Deserve Quality Products

www.scpca5e.com

www.s

SCP PART#: 18/3-GY

DESCRIPTION : 3C/18AWG STRANDED BC.SECURITY/COMMERCIAL AUDI
UL CMR.PVC JKT

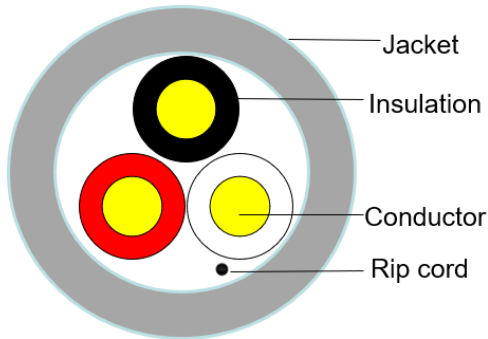

Standard: UL 444 & UL 13. Type (UL) CMR/CL3 c(UL)
EU RoHS 2011/65/EU Compliant
EN50575: 2014 REACTION TO FIRE CLASS Eca

Construction Characteristics:

	Material	Bare Copper
	Size	18AWG X 3C
	Construction	16/0.25+/-0.004mm
	Material	PVC
	Min.Thicknes	0.25mm
	AVG.Thickne	0.28mm
	Diameter	1.7+/-0.05mm
	Colors	Black & Red & White
	Material	PVC
	Min.Thicknes	0.45mm
	AVG.Thickne	0.50mm
	Diameter	4.8+/-0.20mm
	Rip Cord	Nylon
	Color	GRAY
	Min 15D/66r	

Electrical & Physical Characteristics:

Operating Temperature R	- 20°C + 75°C
Minimum installation tempe:	0°C + 40°C
Conductor Resistance/18	Max 22.8ohm/km at 20°C
Dielectric Strength	Min AC1.5KV
Insulation Resistance	Min 50MΩ *km at 20°C
Rated Voltage	Max 300Volts

Marking:

STRUCTURED CABLE PRODUCTS --- 18/3 --- SECURITY CABLE 3C 1
STRANDED--- E198137 SCP3 (UL)C(UL) CMR ---PVC JKT EN50575:2(1)
RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 XXXFEET

Packaging:

	Approx.C		P
	350'		