




**SCP PART#: 22/2COIL-XX**

2C/22 AWG STRANDED BC, COIL PACK, UL CMR PVC JKT - 500 FT COIL

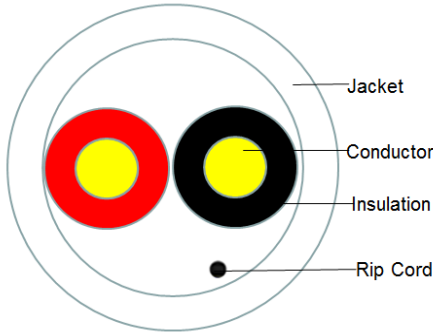

Part Number:	Jacket Color:
22/2COIL-BE	Beige
22/2COIL-BK	Black
22/2COIL-BL	Blue
22/2COIL-BN	Brown
22/2COIL-GN	Green
22/2COIL-GY	Gray
22/2COIL-OR	Orange
22/2COIL-WT	White
22/2COIL-YL	Yellow

**Standard:** UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)  
EU RoHS 2011/65/EU Compliant

**Construction Characteristics:**

Conductor	Material	Bare Copper
	Size	22AWG X 2C
	Construction	7/0.25+/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.18mm
	AVG.Thickness	0.20mm
	Diameter	1.1+/-0.05mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.30mm
	AVG.Thickness	0.40mm
	Diameter	3.0+/-0.20mm
	Rip Cord	Nylon
	Color	Varies
Bend radius	Min 15D/55mm	

**Electrical & Physical Characteristics:**

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance(22AWG)	Max 53.5ohm/km at 20°C
Dielectric Strength	Min AC1.5KV
Insulation Resistance	Min 50MΩ*km at 20°C
Rated Voltage	Max 300Volts

**Marking:**

STRUCTURED CABLE PRODUCTS --- 22/2COIL --- SECURITY CABLE UNSH 2C 22  
AWG STRANDED--- E198134 SCP3 (UL)C(UL) CMR ---PVC JKT RoHS EC  
ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 XXXFEET

**Packaging:**

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
1.9kgs	260x30x260	500ft/COIL	300