


SCP PART#: 22/2SH-GY-HDBX

DESCRIPTION: 2C/22 AWG Stranded BC, AL Foil Shielded w/Drain, Multipurpose/Security Cable, UL CMR PVC Jkt- Gray
1000ft/305m HD Box

Rev06/23

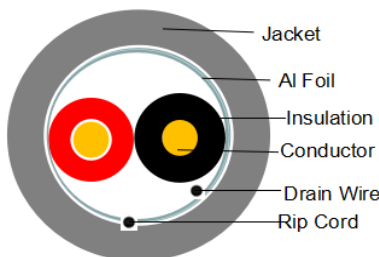

Standard: EN50575 : 2014 REACTION TO FIRE CLASS Dca
EU RoHS 2011/65/EU Compliant

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	22AWG X 2C
	Construction	7/0.25+/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.20mm
	AVG.Thickness	0.25mm
	Diameter	1.1+/-0.05mm
	Colors	Black & Red
Shield	Drain wire(TC)	7/0.20+/-0.004mm
	Shield	AL Foil
Jacket	Material	PVC
	Min.Thickness	0.3mm
	AVG.Thickness	0.40mm
	Diameter	3.00+/-0.20mm
	Rip Cord	Nylon
	Color	Gray
Bend radius	Min 15D/65mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Conductor Resistance(22AWG)	Max 53.5ohm/km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	Max 80Volts
Impedance:	45±5 OHM
Capacitance:conductor-conductor	35±3 pf/ft
Capacitance:conductor-conductor to shield	67±3 pf/ft

Marking:

STRUCTURED CABLE PRODUCTS --- 22/2SH --- SECURITY CABLE 2C/22AWG BC STR
AL FOIL+DRAIN ----- E198137 SCP3 (UL) C(UL) CMR----- PVC JKT RoHS
ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M DDMMYY

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
8.0kgs	343*258*353	1000ft/ HD Box	36