


SCP PART#: CAT6A-U-DB

DESCRIPTION: CAT6 AUGMENTED 10GBASE-T,600 MHZ 23AWG SOLID BC 4PR UTP, ANSI/TIA 568-C.2,ISO/IEC 11801 Ed2 CLASS Ea ,LLDPE JKT

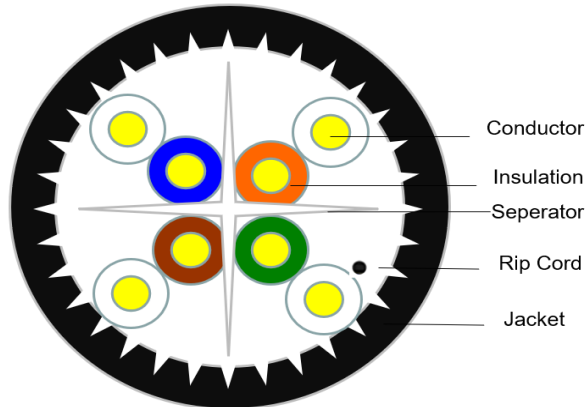

Regulatory TIA/EIA 568-C.2 and ISO/IEC 11801 Ed2
EU RoHS 2011/65 EU Compliant

Application: Lan Cable

Construction Characteristics:

Conductor	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.575+/-0.005mm
Insulation	Material	HDPE
	Min.Thickness	0.20mm
	AVG.Thickness	0.21mm
	Diameter	1.02+/-0.05mm
	Colors	White/Blue White/Orange White/Green White/Brown
Seperator	Spline	Yes
Jacket	Material	LLDPE
	Min.Thickness	0.70mm
	AVG.Thickness	0.80mm
	Diameter	6.8+/-0.20mm
	Rip Cord	Nylon
	Color	BLACK
Bend radius	Min 20D/140mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 72.2ohm/km at 20°C
Dielectric Strength	Min AC1.5KV
Spark Test	5.0KV
Rated Voltage	Max 300Volts
DC Resisitance Unbalance	Max 5%
Pair-to-Ground Capacitance Unbalance	Max 3300pF/km
Characteristic Impedance	100+/-15OHM
Nominal Velocity of Propagation(%)	67~69
Propagation Delay	Max 536ns/100m
Delay Skew	Max 40ns/100m

Marking:			
STRUCTURED CABLE PRODUCTS --- CAT6A-U-DB --- ENHANCED 10GBASE-T 600MHZ UTP ANSI/TIA-568-C.2 ISO/IEC 11801 CLASS EA 4PR 23AWG SOL BC - EN50575:2014 CE LLDPE JKT FT4 75C EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***FEET			
Packaging:			
Approx.Wight(kg)	Approx.Dimension(mm)	Package	Packages per pallet
16.00	360X240X160	1000FT/305M Spool	36

Performance-1

ITEM Frequenc	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
y								
1	2.1	1.9	74.3	80.3	72.3	76.6	72.3	78.4
4	3.8	3.7	65.3	75.6	63.3	74.2	61.5	71.9
8	5.3	5.1	60.8	66	58.8	65.1	55.5	60.9
10	5.9	5.8	59.3	67.6	57.3	65.9	53.3	61.8
16	7.5	7.4	56.2	70.8	54.2	67.2	48.6	63.4
20	8.4	8.2	54.8	71.9	52.8	69.1	46.3	63.7
25	9.4	9.1	53.3	62.3	51.3	60.8	43.8	53.2
31.25	10.5	9.9	51.9	68.7	49.9	67.1	41.2	58.8
62.5	15	15	47.4	59.6	45.4	58.3	32	44.6
100	19.1	18.8	44.3	60	42.3	58	24.5	41.2
200	27.6	27.4	39.8	57.5	37.8	56	10.8	30.1
250	31.1	29.4	38.3	55.8	36.3	54.1	5.5	26.4
300	34.3	33.3	37.1	54.2	35.1	53.4	0.7	20.9
400	43	38.6	35.3	53.8	33.3	52.1	---	---
500	45.3	43.9	33.8	51	31.8	49.3	---	---

Performance-2

ITEM Frequenc	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
y								
1	20	23.6	68	75.6	65	73.3	70.3	74.7
4	23	23.9	56	61.3	53	60.1	59.5	70.5
8	24.5	30	49.9	55.7	46.9	54.8	53.5	60
10	25	28.5	48	55.2	45	53.2	51.3	60.1
16	25	28.2	43.9	49.7	40.9	48.1	46.6	59.8
20	25	27.8	42	48.1	39	46.2	44.3	60.9
25	24.3	27.5	40	45.9	37	45	41.8	51.7
31.25	23.6	24.9	38.1	42.7	35.1	41.7	39.2	57.2
62.5	21.5	24.1	32.1	39.4	29.1	37.4	30	43.3
100	20.1	23.5	28	35	25	33.2	22.5	39.2
200	18	23.2	22	32.8	19	30.2	8.8	28.6
250	17.3	21.5	20	30.7	17	27.7	3.5	24.7
300	16.8	20.8	18.5	26.5	15.5	25.4	---	---
400	15.9	18.9	15.8	23.4	12.8	22.1	---	---
500	15.2	18.6	14	19.5	11	18.7	---	---