

CATEGORY 6 SHIELDED CABLE, 4 PAIR, F/UTP, UL CMR


Description:

CAT6 SHIELDED F/UTP- ENHANCED 550MHz 23AWG
 SOLID BC, 4PR, F/UTP, ANSI/TIA 568.2-D, ISO/IEC 11801
 CLASS E, UL CMR, PVC JKT - 1000 FT/305M SPOOL

Regulatory:

UL 444 ANSI/TIA 568.2-D and ISO/IEC 11801 Class E
 Type (UL) CMR or c(UL) FT4
 EU RoHS 2011/65 EU Compliant

Application: Lan Cable

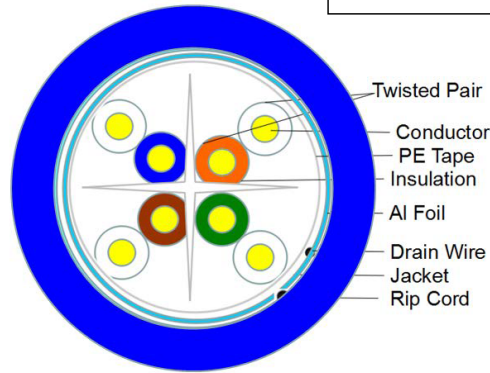

Part Number:	Jacket Color:
CAT6SH-BK	Black
CAT6SH-BL	Blue
CAT6SH-GY	Gray
CAT6SH-WT	White

Construction Characteristics:

Conductor	Material	Solid Bare Copper	
	Size	23AWG X 4P	
	Construction	1/0.57+/-0.005mm	
Insulation	Material	HDPE	
	Min.Thickness	0.200mm	
	AVG.Thickness	0.220mm	
	Diameter	1.1+/-0.05mm	
	Colors		Blue- White/Blue
			Orange-White/Orange
		Green-White/Green	
Shield	Wrap	PET tape	
	Drain wire TC	1/0.50+/-0.005	
	Shield	AL Foil	
Jacket	Material	PVC	
	Min.Thickness	0.60mm	
	AVG.Thickness	0.70mm	
	Diameter	7.50+/-0.20mm	
	Rip Cord	Nylon	
	Color	Blue	
Bend radius		Min 20D/150mm	

Electrical & Physical Characteristics:

Operating Temperature Range		- 20°C + 75°C	
Minimum Installation Temperature		0°C + 40°C	
Conductor Resistance		Max 72.2ohm/km at 20°C	
Dielectric Strength		Min AC1.5KV	
Spark Test		5.0KV	
Insulation	Unaged	Tensile Strength	12.3Mpa
		Elongation	150%
	Aged	Tensile Strength	9.8Mpa(100°C 168h)
		Elongation	100%(100°C 168h)
Jacket	Unaged	Tensile Strength	13.8Mpa
		Elongation	100%
	Aged	Tensile Strength	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Rated Voltage		Max 300Volts	
DC Resisitance Unbalance		Max 5%	
Pair-to-Ground Capacitance Unbalance		Max 3300pF/km	
Characteristic Impedance		100+/-15OHM	
Nominal Velocity of Propagation(%)		67~69	
Propagation Delay		Max 536ns/100m	
Delay Skew		Max 45ns/100m	

Marking:

STRUCTURED CABLE PRODUCTS --- CAT6-SH --- CAT6 SHIELDED ENHANCED 550MHz F/UTP ANSI/TIA 568.2-D
 ISO/IEC 11801 CLASS E E198134 SCP3 (UL) C(UL) CMR 4PR 23AWG SOL BC - PVC JKT FT4 75C
 EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
21kgs/46.297lbs	380X290X200	1000FT/305M Spool	27

Performance

ITEM Frequency	Attenuatio n Max	NEXT Min (dB)	PS NEXT Min (dB)	ACR Min (dB)	RL Min (dB)	ELFEXT Min (dB)	PS ELFEXT	PSACR Min (dB)
1	2	74.3	72.3	72.3	20	67.8	64.8	70.3
4	3.8	65.3	63.3	61.5	23	55.8	52.8	59.5
8	5.3	60.8	58.8	55.5	24.5	49.7	46.7	53.5
10	6	59.3	57.3	53.3	25	47.8	44.8	51.3
16	7.6	56.2	54.2	48.6	25	43.7	40.7	46.6
20	8.5	54.8	52.8	46.3	25	41.8	38.8	44.3
25	9.5	53.3	51.3	43.8	24.3	39.8	36.8	41.8
31.25	10.7	51.9	49.9	41.2	23.6	37.9	34.9	39.2
62.5	15.4	47.4	45.4	32	21.5	31.9	28.9	30
100	19.8	44.3	42.3	24.5	20.1	27.8	24.8	22.5
200	29	39.8	37.8	10.8	18	21.8	18.8	8.8
250	32.8	38.3	36.3	5.5	17.3	19.8	16.8	3.5
300	36.4	37.1	35.1	0.7	16.8	18.3	15.3	---
400	43	35.3	33.3	---	15.9	15.8	12.8	---
500	48.9	33.8	31.8	---	15.2	13.8	10.8	---