


**SCP PART#: SP-4.0/4-LSZH-BK-305M**

**Description:**

Commercial Speaker Cable - B2ca Rated - 4 Cond/4.0mm2 Oxygen Free Copper, EN50575 B2ca-s1a,d1,a2 Low Smoke Zero Halogen, Indoor/Outdoor UV Sun Res Jkt- Black- 305m/1000ft Wooden Spool

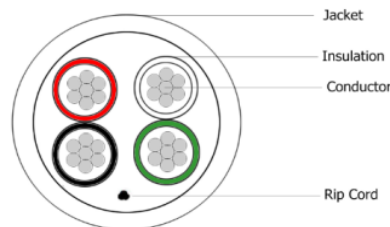

**Construction Characteristics:**

|            |               |                           |
|------------|---------------|---------------------------|
| Conductor  | Material      | Stranded Bare Copper      |
|            | Size          | 4.0mm2*4C 56 stranded     |
|            | Construction  | 0.30+/-0.005mm            |
| Insulation | Material      | LSZH                      |
|            | AVG.Thickness | 0.45~0.5mm                |
|            | Diameter      | 3.5+/-0.15mm              |
|            | Colors        | Red,Black,White,Green     |
| Jacket     | Material      | LSZH                      |
|            | Nom.Thickness | 0.75mm                    |
|            | Diameter      | 10.0 + /-0.50mm           |
|            | Rip Cord      | Yes                       |
|            | Color         | Black(similar to RAL9004) |

**Electrical & Physical Characteristics**

|                                |                  |             |
|--------------------------------|------------------|-------------|
| Operating Temperature Range    |                  | -20℃ ~ +80℃ |
| Voltage Rating                 |                  | 300 V       |
| Conductor DC resistance (20 ℃) |                  | <=4.95 Ohms |
| Sheath Physical Properties     |                  | 100 ℃*168h  |
| Before Aging                   | Tensile Strength | >=10.0Mpa   |
|                                | Elongation       | >=125%      |
| After Aging                    | Tensile Strength | >=8.0Mpa    |
|                                | Elongation       | >=100%      |

**Markings** (squares are just for identifying space numbers ,will not be printed)

STRUCTURED CABLE PRODUCTS -- SP-4.0/4-LSZH -- Commercial Speaker Cable / Audio Cable -- 4C/4.00mm2 56x0.30mm Strand Oxygen Free Copper Indoor/Outdoor UV Sun Res LSZH JKT EN50575 B2ca-s1a,d1,a2 EU RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*M MM/YY LOT # 0502248

**Packaging**

| Approx Weight | Approx Dimension (Spool) | Package    | Spools per pallet | Pallet weight |
|---------------|--------------------------|------------|-------------------|---------------|
| 68.3kg/spool  | 47x20x32cm               | 305M/spool | 12 spools         | 820kg         |