


SCP PART#: SP-4.0/4-LSZH-BK-500M

Description:

Commercial Speaker Cable - B2ca Rated - 4 Cond/4.0mm² Oxygen Free Copper, EN50575 B2ca-s1a,d1,a2 Low Smoke Zero Halogen, Indoor/
Outdoor UV Sun Res Jkt- Black-500m/1640ft Wooden Spool

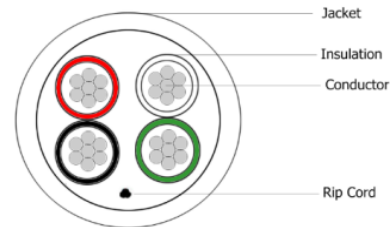

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	4.0mm ² *4C 56 stranded
	Construction	0.30+/-0.005mm
Insulation	Material	LSZH
	AVG.Thickness	0.45~0.5mm
	Diameter	3.5+/-0.15mm
	Colors	Red,Black,White,Green
Jacket	Material	LSZH
	Nom.Thickness	0.75mm
	Diameter	10.0 + /-0.50mm
	Rip Cord	Yes
	Color	Black(similar to RAL9004)

Electrical & Physical Characteristics

Operating Temperature Range		-20℃ ~ +80℃
Voltage Rating		300 V
Conductor DC resistance (20 ℃)		<=4.95 Ohms
Sheath Physical Properties		100℃*168h
Before Aging	Tensile Strength	>=10.0Mpa
	Elongation	>=125%
After Aging	Tensile Strength	>=8.0Mpa
	Elongation	>=100%

Markings (squares are just for identifying space numbers ,will not be printed)

STRUCTURED CABLE PRODUCTS -- SP-4.0/4-LSZH -- Commercial Speaker Cable / Audio Cable -- 4C/4.00mm² 56x0.30mm Strand Oxygen Free Copper Indoor/Outdoor UV Sun Res LSZH JKT EN50575 B2ca-s1a,d1,a2 EU RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M MM/YY LOT # 0502248

Packaging

Approx Weight	Approx Dimension (Spool)	Package	Spools per pallet	Pallet weight
115kg/spool	57x20x32cm	500M/spool	8 spools	924kg