


RG6/U-S-CCS-BK-RIB

REV.A

Cross Section

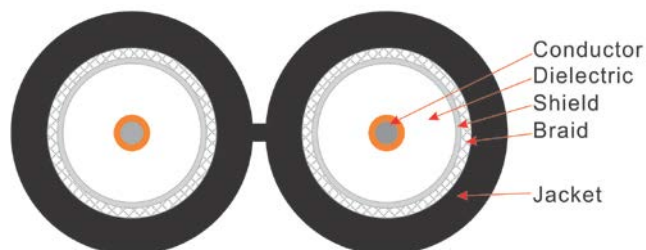

Performance

Electrical Characteristics:[@68°F.(20°C.)]

Frequency (MHz)	Attenuation (dB/100m)	Attenuation (dB/100m)
5	0.79	2.57
10	0.82	2.66
50	1.47	4.79
100	2.05	6.72
200	2.84	9.28
400	4.06	13.28
700	5.60	18.36
900	6.24	20.43
1000	6.60	21.61
1200	7.50	24.59
1450	8.04	26.36
1800	8.84	28.98
2200	9.77	32.03
2500	11.13	36.47
2750	11.58	37.94
3000	12.06	39.54

Description

RG6/U SIAMESE DUAL COAX CATV 18 AWG CCS 60% AL BRAID- BLACK - 500 FT RIB

Marking

STRUCTURED CABLE PRODUCTS E245362 (UL) OR C(UL) CM 2x18 AWG CCS 75C MM/YY -- P/N: RG6/U-S-CCS -- RG6/U DUAL COAX CATV 60% AL BRAID CE EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 xxxxFEET

Construction

SINGLE RG6/U-CCS

Center Conductor:	Copper Clad Steel
Size	18AWG
Dia.(in/mm)	0.0403/1.02
Insulate	Skin Foam PE
Nom. Thickness(in/mm)	0.070/1.78
Insulation Dia.(in/mm)	0.0180/4.57
The First Shield	Bonded Aluminum Foil
Coverage Area (%)	100
The First Braid Shield	Aluminum Wire
Coverage Area(%)	60
Jacket	Black FR-PVC
Nom. Thickness(in/mm)	0.030/0.76
Min. Thickness(in/mm)	0.024/0.61
Cable Dia.(in/mm)	0.272/6.91
Two RG6/U-CCS with "8"	
Packing	Reel In Box
Length(ft/m)	500/152.5
Gross Weight(lbs/kg)	31.3/14.2

Dielectric Strength (kV/min)	1
Impedance (ohms)	75±3.0
SRL (dB)	5~1000MHz >=20 1001~3000MHz >=15
Capacitance (pF/ft)	16.2
Conductor DCR@ 20°C (ohms/kft)	31
DC Loop Resistance@ 20°C (ohms/kft)	45.45
Velocity Of Propagation (%)	85

Mechanical Characteristics:

Test Object:	Jacket
Test Material	
Before Tensile strength (psi)	2000
Aging Elongation (%)	200
Aging Condition (°C_hrs)	100_168
After Tensile strength (%)	>=85%unaged
Aging Elongation (%)	>=50%unaged
Cold Bend (-20±2°C/4hrs)	No Crack
Jacket Longitudinal Shrinkage (%)	>=5
Center Conductor break Strength (lbs)	85
Operating Temperature Range (°C)	-20~75

Standards

UL, CE, RoHS