


DUPLEX ZIP OS2 LSZH SCP-EASYFIBER™ W/CORNING® SMF-28® ULTRA - DUPLEX ZIP SINGLE MODE OS2 9/125, LSZH EN50575 Dca-s1,d1,a1 INDOOR/OUTDOOR, YELLOW JACKET, 2000FT/610M REEL IN BOX

SCP PART#:
EF-DUP-OS2LSZH-YL

Features at a Glance

- Single Mode OS2
- Duplex (two strand) zip cord construction
- Yellow color
- LSZH-rated for indoor and outdoor applications
- Tight buffered construction
- 2mm outer diameter
- Corning® SMF-28® Ultra fiber

SCP-EasyFiber™

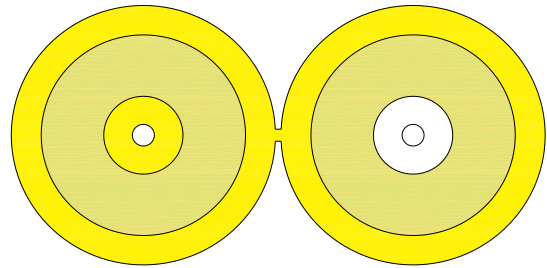

Specifications			
Fiber Count	Duplex (2 strands)		
Outer Jacket	LSZH, Yellow color		
Strength Member	Aramid Yarn		
Internal Jacket	0.9mm Tight buffer		
Outer Jacket Size	2mm x 2		
Physical Characteristics			
Fiber Type	Single Mode OS2 9/125		
Fiber Core Size	9µm		
Fiber Make	Corning® SMF-28® Ultra		
Wavelength	1310 / 1550nm		
Maximum Attenuation	0.5dB @ 0.4km		
Network Link Length (10Gb/s)	10,000m		
Minimum Bend Radius	8.7mm		
Environmental			
Storage Temperature	-40°C to +70°C		
Operating Temperature	-0°C to +70°C		
Ratings	EN 13501-6, ROHS		
Packaging			
Weight	Dimensions	Package	Packages per Pallet
6.8 kg	36 x 34 x 30cm	2000ft/610m Reel in Box	45

Optical Characteristics: Corning SMF-28® Ultra

Characteristics	Conditions	Specified Values	Units
Geometrical characteristics			
Cladding diameter		125.0±1.0	um
Cladding non-circularity		≤0.7	%
Coating diameter		242±5	um
Coating/cladding concentricity error		<12	um
Core/cladding concentricity error		≤0.5	um
Optical characteristics			
Attenuation	1310nm	≤0.32	dB/km
	1383nm	≤0.32	dB/km
	1490nm	≤0.21	dB/km
	1550nm	≤0.18	dB/km
	1625nm	≤0.20	dB/km
Attenuation vs. Wavelength max. A difference	1285~1330nm	≤0.03	dB/km
	1525~1575nm	≤0.02	dB/km
Zero dispersion wavelength		1304~1324	nm
Zero dispersion slope		≤0.092	ps/(nm ² *km)
Polarization mode dispersion			
PMD maximum individual fibre		≤0.1	ps/km ^{1/2}
PMD design link value		≤0.04	ps/km ^{1/2}
Cable cut off wavelength		≤1260	nm
Mode field diameter	1310nm	8.8~9.6	um
	1550nm	9.9~10.9	um
Group index of refraction	1310nm	1.4691	
	1550nm	1.4696	
Environmental characteristics	1310nm、1550nm&1625nm		
Temperature cycling	-60℃ to +85℃	≤0.05	dB/km
Temperature-humidity cycling	-10℃ to +85℃, 4% to 98% RH	≤0.05	dB/km
Water immersion	23℃, 30 days	≤0.05	dB/km
Dry heat	85℃, 30 days	≤0.05	dB/km
Damp heat	85℃, 85%RH, 30 days	≤0.05	dB/km
Mechanical specification			
Proof test		≥100	Kpsi
Macro bending induced loss			
1Turns @10mm Radius	1550nm	≤0.5	dB
1Turns @10mm Radius	1625nm	≤1.5	dB
10Turns @15mm Radius	1550nm	≤0.05	dB
10Turns @15mm Radius	1625nm	≤0.30	dB
100Turns @25mm Radius	1310&1550&1625 nm	≤0.01	dB
Dynamic stress corrosion susceptibility parameter		20	

Cable Jacket Marking:

STRUCTURED CABLE PRODUCTS INC --- P/N: EF-DUP-OS2LSZH --- SCP-EASYFIBER™ DUPLEX ZIP 2 STRAND SINGLE MODE OS2 9/125, CORNING® SMF-28® ULTRA, ITU G652.D, BEND INSENSITIVE, INDOOR/OUTDOOR RATED, UV LSZH JKT EN50575 Dca-s1,d1,a1 RoHS ***M