




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF **STRUCTURED CABLE PRODUCTS** AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF **STRUCTURED CABLE PRODUCTS**

REV.	REVISED DESCRIPTION	DATE	CHECKED
A1	FIRST RELEASE	2016.05.17	
A2	Change is outside the cable for CL2 level	2016.06.22	
A3	Change wire printing content combined with customer logo;	2016.09.20	
A4	Change the shape of the forming die	2016.10.31	

15FT 4500±80

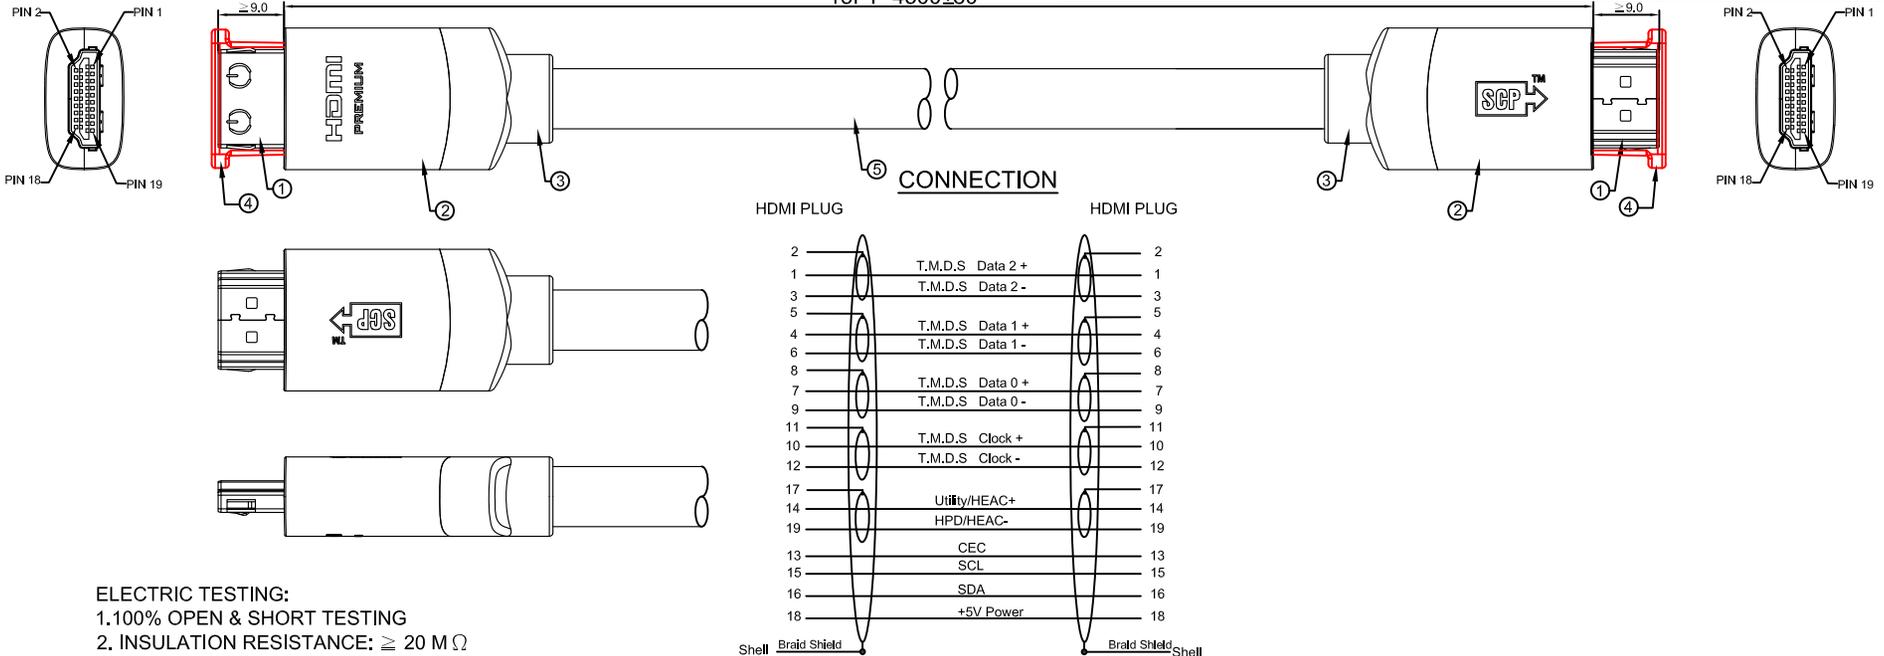

- ELECTRIC TESTING:  
 1. 100% OPEN & SHORT TESTING  
 2. INSULATION RESISTANCE:  $\geq 20 \text{ M}\Omega$   
 3. CONDUCTOR RESISTANCE:  $\leq 5 \Omega$   
 4. VOLTAGE: 300V DC/0.1S

Packing: 1PC / Bag

5	{[(1/0.404Bc+HDPE)*1P+1/0.404Tc+AL/Mylar]*4P+(1/0.254Bc+HDPE+1/0.254Bc+AL/Mylar)*1P+(1/0.404Bc+HDPE)*4C+Filler+AL Mylar+24/12/0.08(85%)Tc Braid}*1C OD=8.0±0.15MM Jacket=Black PVC Jacket with White Text :STRUCTURED CABLE PRODUCTS PREMIUM HIGH SPEED HDMI R(logo) CABLE WITH ETHERNET E148115-D (UL) c(UL) TYPE CL2 SHIELDED 75°C FT4 26AWG/12C +30AWG/2C <span style="color:red">▲A4</span>
4	Plastic Cap-Transparent(2312110024)
3	PVC - Black 50P (31401012050)
2	ABS Shell-Purple(268C) <span style="color:red">▲A4</span>
1	HDMI Plug - Gold Plated (3033700ACG)
ITEM	SPECIFICATION

TOLERANCES UNLESS OTHERWISE STATED  
 X. = ± 1  
 .X = ± 0.2  
 .XX = ± 0.1

**SCP** **Structured Cable Products™**  
 Quality Installations Deserve Quality Products

ERP NO.:		Sample No.	
DOC No.:		REVISION	A4
CUSTOMER:	SCP	UNIT	mm
CUSTOMER P/N:	990UHDV-15	SCALE	NO
DESCRIPTION	Premium HDMI A/P - HDMI A/P 26#	PAGE NO	1/1
		DATE	2016.10.31
APPROVAL	CHECKED	DRAWN	ZXY