

SCP PART#: CAT5E-SH-BL

Description:

CAT5E SHIELDED 350 MHz 24 AWG SOLID BC,
 4PR, F/UTP, UL CMR, ANSI/TIA 568.2-D,
 ISO/IEC 11801 CLASS D, PVC JKT - BLUE
 1000FT/305M BOX


Rev03/20

Regulatory:

UL 444, ANSI/TIA 568.2-D and ISO/IEC 11801 Class D
 Type (UL) CMR or c(UL) FT4
 EU RoHS 2011/65 EU Compliant

Application:

Networking Lan Cable

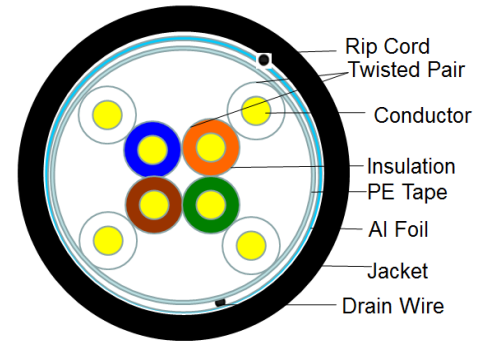

Construction Characteristics:

Electrical & Physical Characteristics:

Conductor	Material	Solid Bare Copper	Operating Temperature Range		- 20°C + 75°C	
	Size	24AWG X 4P	Minimum Installation Temperature		0°C + 40°C	
	Construction	1/0.51+/-0.004mm	Conductor Resistance		Max 93.8 ohm/km at 20°C	
Insulation	Material	HDPE	Dielectric Strength		Min AC1.5KV	
	Min.Thickness	0.250mm	Minimum Flexing Bend Radius		>20x the jacket diameter	
	AVG.Thickness	0.265mm	Insulation	Unaged	Tensile Strength	16.5Mpa
	Diameter	1.05+/-0.01mm			Elongation	500%
	Colors		Blue- White/Blue	Aged	Tensile Strength	14.2Mpa(100°C 168h)
			Orange-White/Orange			Elongation
			Green-White/Green	Jacket	Unaged	Tensile Strength
	Brown-White/Brown		Elongation		100%	
Wrap	PE Tape	Aged	Tensile Strength	11.7Mpa(100°C 168h)		
Drain Wire (TC)	1/0.40+/-0.004mm		Elongation	50%(100°C 168h)		
Shield	AL Foil	Rated Voltage		Max 300Volts		
Jacket	Material	PVC	DC Resisitance Unbalance		Max 5%	
	Thickness	0.6+/-0.05mm	Pair-to-Ground Capacitance Unbalance		Max 3300pF/km	
	Diameter	6.0+/-0.40mm	Characteristic Impedance		100+/-15OHM	
	Rip Cord	Nylon	Nominal Velocity of Propagation(%)		67~69	
	Color	Per request	Propagation Delay		Max 536ns/100m	
Bend Radius		Min 20D/120mm	Delay Skew		Max 45ns/100m	

Marking:

STRUCTURED CABLE PRODUCTS ---CAT5E--SH-- CAT5E SHIELDED ENHANCED 350MHz F/UTP ANSI/TIA-568.2-D
 ISO/IEC 11801 CLASS D E198134 SCP3 (UL) C(UL) CMR 4PR 24AWG SOL BC - PVC JKT FT4 75C
 EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
13.2kgs/29.101lbs	400X290X400	1000ft/305m Box	36/24

Performance-1

ITEM Frequency v	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard		Standard		Standard		Standard	
1	2		65.3		62.3		63.3	
4	4.1		56.3		53.3		52.2	
8	5.8		51.8		48.8		46	
10	6.5		50.3		47.3		43.8	
16	8.2		47.2		44.2		39	
20	9.3		45.8		42.8		36.5	
25	10.4		44.3		41.3		33.9	
31.25	11.7		42.9		39.9		31.2	
62.5	17		38.4		35.4		21.4	
100	22		35.3		32.3		23.3	
155	28.1		32.4		29.4		4.3	
200	32.4		30.8		27.8		---	---
300	41		28.1		25.1		---	---
350	44.9		27.1		24.1		---	---

Performance-2

ITEM Frequency v	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard		Standard		Standard		Standard	
1	20		63.8		60.8		60.3	
4	23		51.8		48.8		49.2	
8	24.5		45.7		42.7		43	
10	25		43.8		40.8		40.8	
16	25		39.7		36.7		36	
20	25		37.8		34.8		33.5	
25	24.3		35.8		32.8		30.9	
31.25	23.6		33.9		30.9		28.2	
62.5	21.5		27.8		24.8		18.4	
100	20.1		23.8		20.8		10.3	
155	18.8		20		17		1.3	
200	18		1.7		14.7		---	---
300	16.8		14.2		11.2		---	---
350	16.3		12.9		9.9		---	---