

SCP PART#: CAT6SH-WT-LSZH

Rev01/22

Description:


CAT6 SHIELDED F/UTP - LOW SMOKE ZERO HALOGEN-
 ENHANCED 550 MHz 23 AWG SOL BC, 4PR, F/UTP,
 ANSI/TIA 568.2-D ISO/IEC 11801 CLASS E, EN50575
 Dca-s1,d1,a1 LSZH JKT - WHITE - 1000 FT/305M BOX

Regulatory

ANSI/TIA 568.2-D and ISO/IEC 11801 Class E
 EU RoHS 2011/65 EU Compliant
 EN50575
 REACTION TO FIRE Dca-s1,d1,a1

Application:

Networking Lan Cable

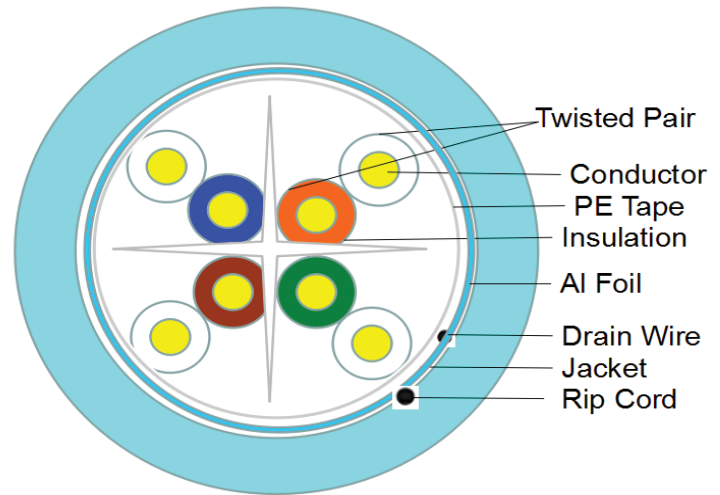

Construction Characteristics:

Conductor	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.57+/-0.005mm
Insulation	Material	HDPE
	Min.Thickness	0.200mm
	AVG.Thickness	0.220mm
	Diameter	1.1+/-0.1mm
	Colors	Blue- White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Shield	Wrap	PET tape
	Drain wire TC	1/0.50+/-0.005
	Shield	AL Foil
Jacket	Material	LSZH
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	7.50+/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius		Min 20D/150mm

Electrical & Physical Characteristics:

Operating Temperature Range		- 20°C + 75°C	
Conductor Resistance		Max 72.2ohm/km at 20°C	
Dielectric Strength		Min AC1.5KV	
Spark Test		5.0KV	
Insulation	Unaged	Tensile Strength	12.3Mpa
		Elongation	150%
	Aged	Tensile Strength	9.8Mpa(100°C 168h)
		Elongation	100%(100°C 168h)
Jacket	Unaged	Tensile Strength	11.3Mpa
		Elongation	100%
	Aged	Tensile Strength	8.5Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Rated Voltage		Max 300Volts	
DC Resisitance Unbalance		Max 5%	
Pair-to-Ground Capacitance Unbalance		Max 3300pF/km	
Characteristic Impedance		100+/-15OHM	
Nominal Velocity of Propagation(%)		67~69	
Propagation Delay		Max 536ns/100m	
Delay Skew		Max 40ns/100m	

Marking:

STRUCTURED CABLE PRODUCTS --- CAT6-SH --- CAT6 SHIELDED ENHANCED 550MHZ F/UTP ANSI/TIA 568.2-D
 ISO/IEC 11801 CLASS E 4PR 23AWG SOL BC - LSZH JKT EN50575:2014 CE Dca-s1,d1,a1 EU RoHS EC
 ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M DDDMMYY

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
20.5kgs/45.194lbs	380X290X200	1000FT/305M Spool	27

Performance

ITEM Frequency	Attenuatio n Max (dB)	NEXT Min (dB)	PS NEXT Min (dB)	ACR Min (dB)	RL Min (dB)	ELFEXT Min (dB)	PS ELFEXT Min (dB)	PSACR Min (dB)
1	2	74.3	72.3	72.3	20	67.8	64.8	70.3
4	3.8	65.3	63.3	61.5	23	55.8	52.8	59.5
8	5.3	60.8	58.8	55.5	24.5	49.7	46.7	53.5
10	6	59.3	57.3	53.3	25	47.8	44.8	51.3
16	7.6	56.2	54.2	48.6	25	43.7	40.7	46.6
20	8.5	54.8	52.8	46.3	25	41.8	38.8	44.3
25	9.5	53.3	51.3	43.8	24.3	39.8	36.8	41.8
31.25	10.7	51.9	49.9	41.2	23.6	37.9	34.9	39.2
62.5	15.4	47.4	45.4	32	21.5	31.9	28.9	30
100	19.8	44.3	42.3	24.5	20.1	27.8	24.8	22.5
200	29	39.8	37.8	10.8	18	21.8	18.8	8.8
250	32.8	38.3	36.3	5.5	17.3	19.8	16.8	3.5
300	36.4	37.1	35.1	0.7	16.8	18.3	15.3	---
400	43	35.3	33.3	---	15.9	15.8	12.8	---
500	48.9	33.8	31.8	---	15.2	13.8	10.8	---