

CATEGORY 6 CABLE, 4 PAIR, UTP, UL CMR

Description:

CAT6 ENHANCED 550 MHz 23 AWG SOLID BC, 4PR, UTP, ANSI/TIA 568.2-D, ISO/IEC 11801 CLASS E, UL CMR, PVC JKT, 1000FT/305M BOX


Part Number:	Jacket Color:
CAT6-BK	Black
CAT6-BL	Blue
CAT6-GN	Green
CAT6-GY	Gray
CAT6-OR	Orange
CAT6-PUR	Purple
CAT6-RD	Red
CAT6-WT	White
CAT6-YL	Yellow

Regulatory:

UL 444, ANSI/TIA 568.2-D,
ISO/IEC 11801 CLASS E
Type (UL) CMR or c(UL) FT4
EU RoHS 2011/65 EU Compliant
PoE: IEEE 802.3bt

Application: Networking Lan Cable

Low Voltage Cable -Telecommunication
power limited

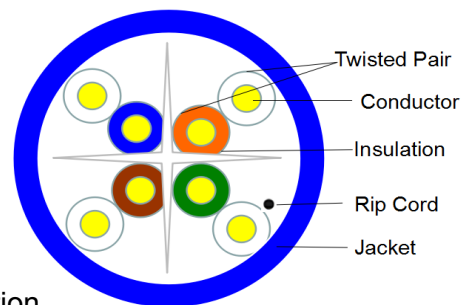

Construction Characteristics:

Conductor	Material	Solid Bare Copper
	Size	23AWG X 4P
Insulation	Material	HDPE
	Min.Thickness	0.200mm
	AVG.Thickness	0.220mm
	Diameter	1.03+/-0.01mm
	Colors	Blue- White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	6.20+/-0.10mm
	Rip Cord	Nylon
	Color	Per request
Bend Radius		Min 20D/125mm

Electrical & Physical Characteristics:

Operating Temperature Range		- 20°C +75°C	
Minimum Installation Temperature		0°C + 40°C	
Conductor Resistance		Max 72.2ohm/km at 20°C	
Dielectric Strength		Min AC1.5KV	
Spark Test		5.0KV	
Insulation	Unaged	Tensile Strength	16.5Mpa
		Elongation	500%
Insulation	Aged	Tensile Strength	14.2Mpa(100°C 168h)
		Elongation	250%(100°C 168h)
Jacket	Unaged	Tensile Strength	13.8Mpa
		Elongation	100%
Jacket	Aged	Tensile Strength	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Rated Voltage Insulated/Operating		Max 300V/80V	
DC Resisitance Unbalance		Max 5%	
Pair-to-Ground Capacitance Unbalance		Max 3300pF/km	
Characteristic Impedance		100+/-15OHM	
Nominal Velocity of Propagation(%)		67~69	
Propagation Delay		Max 536ns/100m	
Delay Skew		Max 45ns/100m	

Marking:

STRUCTURED CABLE PRODUCTS --- CAT6 --- CAT6 ENHANCED 550MHz UTP ANSI/TIA 568.2-D ISO/IEC 11801 CLASS E
E198134 SCP3 (UL) C(UL) CMR 4PR 23AWG SOL BC - PVC JKT FT4 75C EU RoHS EC
ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
14.2kgs/31.305lbs	400X290X400	1000FT/Box	36

Performance-1

ITEM Frequency	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	2	1.9	74.3	80.3	72.3	76.6	72.3	78.4
4	3.8	3.7	65.3	75.6	63.3	74.2	61.5	71.9
8	5.3	5.1	60.8	66	58.8	65.1	55.5	60.9
10	6	5.8	59.3	67.6	57.3	65.9	53.3	61.8
16	7.6	7.4	56.2	70.8	54.2	67.2	48.6	63.4
20	8.5	8.2	54.8	71.9	52.8	69.1	46.3	63.7
25	9.5	9.1	53.3	62.3	51.3	60.8	43.8	53.2
31.25	10.7	9.9	51.9	68.7	49.9	67.1	41.2	58.8
62.5	15.4	15	47.4	59.6	45.4	58.3	32	44.6
100	19.8	18.8	44.3	60	42.3	58	24.5	41.2
200	29	27.4	39.8	57.5	37.8	56	10.8	30.1
250	32.8	29.4	38.3	55.8	36.3	54.1	5.5	26.4
300	36.4	33.3	37.1	54.2	35.1	53.4	0.7	20.9
400	43	38.6	35.3	53.8	33.3	52.1	---	---
500	48.9	43.9	33.8	51	31.8	49.3	---	---

Performance-2

ITEM Frequency	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	20	23.6	67.8	75.6	64.8	73.3	70.3	74.7
4	23	23.9	55.8	61.3	52.8	60.1	59.5	70.5
8	24.5	30	49.7	55.7	46.7	54.8	53.5	60
10	25	28.5	47.8	55.2	44.8	53.2	51.3	60.1
16	25	28.2	43.7	49.7	40.7	48.1	46.6	59.8
20	25	27.8	41.8	48.1	38.8	46.2	44.3	60.9
25	24.3	27.5	39.8	45.9	36.8	45	41.8	51.7
31.25	23.6	24.9	37.9	42.7	34.9	41.7	39.2	57.2
62.5	21.5	24.1	31.9	39.4	28.9	37.4	30	43.3
100	20.1	23.5	27.8	35	24.8	33.2	22.5	39.2
200	18	23.2	21.8	32.8	18.8	30.2	8.8	28.6
250	17.3	21.5	19.8	30.7	16.8	27.7	3.5	24.7
300	16.8	20.8	18.3	26.5	15.3	25.4	---	---
400	15.9	18.9	15.8	23.4	12.8	22.1	---	---
500	15.2	18.6	13.8	19.5	10.8	18.7	---	---