



Structured Cable Products®

Quality Installations Deserve Quality Products

www.scpca5e.com

sales@scpcat5e.com

Direct: 954-327-5770

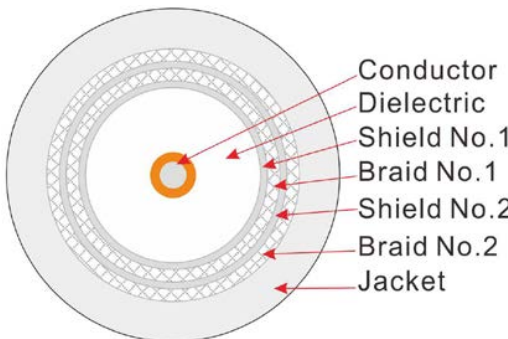
Toll Free: 866-470-5742

SCP PART#: RG6/UQ-CCS-WT-ETL-CMR

UPC: 817777014402

DESCRIPTION:

RG6/U QUAD SHIELD 3.0 GHz 18 AWG CCS, 60%/40% AL BRAID, ETL CMR- 1000 FT BOX- WHITE

Cross Section		Performance	
		Electrical Characteristics:[@68°F.(20°C.)]	
Description		Frequency (MHz)	Attenuation (dB/100ft)
HDTV CABLE, RG6/U QUAD SHIELD 18 AWG CCS, 75OHMS, 3.0GHz, ETL, ECONOMIC		5	0.79
Marking		10	0.82
STRUCTURED CABLE PRODUCTS xxxxxx c(ETL)us CMR 18 AWG CCS 75C MM/YY -- P/N: RG6/UQ-CCS -- RG6/U QUAD SHIELD SWEEP TESTED TO 3.0 GHz HDTV, AL BRAID CE EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 1000FEET.....0001FEET		50	1.47
Construction		100	2.05
Center Conductor :		200	2.84
Size		400	4.06
Dia.(in/mm)		700	5.60
Insulate		900	6.24
Nom. Thickness(in/mm)		1000	6.60
Insulation Dia.(in/mm)		1200	7.50
The First Shield		1450	8.04
Coverage Area (%)		1800	8.84
The First Braid Shield		2200	9.77
Coverage Area(%)		2500	11.13
The second Shield		2750	11.58
Coverage Area(%)		3000	12.06
the Second Braid Shield		Mechanical Characteristics:	
Coverage Area(%)		Test Object:	
Jacket		Test Material	
Nom. Thickness(mm)		Before	
Min. Thickness(mm)		Aging	
Cable Dia.(mm)		Cold Bend	
Packing		Jacket Longitudinal Shrinkage	
Length(ft/m)		Center Conductor break Strength	
Gross Weight(lbs/kg)		Operating Temperature Range	
		Standards	
		ETL, CE, RoHS	