


SCP PART#: EF-OS2LSB2-8DIST-BK

Description:

8 Strand Tight Buffered Distribution OS2 LSZH B2ca - SCP-EasyFiber™
w/Corning® SMF-28® Ultra - Single Mode OS2 9/125, 2.0mm,
LSZH EN50575 B2ca-s1a,d0,a1 Indoor/Outdoor UV, Black Jacket,
1640ft/500m Reel in Box

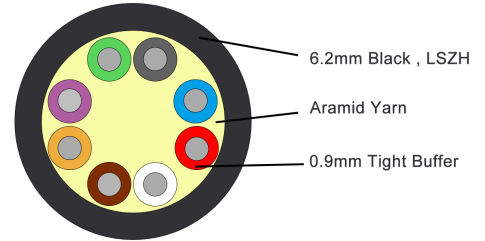

Regulatory:

EU RoHS 2011/65 EU Compliant
ITU-T G.657.A1 -10mm Macrobend Radius SMF

Cable Technical Parameters (Meet IEC 60794-2):

Fiber	Count	8
	Type	Corning SMF-28®Ultra
Cable	OD(mm)	6.2±0.5
	Wall Thickness	0.9±0.1
	Material	LSZH – CPR B2ca
	Color	Black – RAL9004
Buffer	OD(um)	900±50 um
	Material	PVC-OFNR
	Color	Blue/Orange/Green/Brown Grey/White/Red/Purple
Nominal weight(kg/km)		33
Max.tensile Strength(N)	Short-term	400
	Long-term	130
Min.Bending Radius(mm)	Dynamic	20D
	Static	10D
Max.Crush Resistance(N/100mm)	Short-term	300N/100mm
	Long-term	1000N/100mm
Cable attenuation	1310nm (SMF)	≤0.4 dB/km
	1550nm (SMF)	≤0.3 dB/km
Strength Members		Aramid yarn
Environmental Protection		RoHS COMPLIANT
Temperature range	Storage or transportation	-20~70℃
	Operation	-20~60℃
	Installation	-20~60℃

Optical Characteristics:

Corning SMF-28®Ultra

Characteristics	Conditions	Specified Values	Units
Geometrical characteristics			
Cladding diameter		125.0±1.0	um
Cladding non-circularity		≤0.7	%
Coating diameter		242±5	um
Coating/cladding concentricity error		<12	um
Core/cladding concentricity error		≤0.5	um
Optical characteristics			
Attenuation	1310nm	≤0.32	dB/km
	1383nm	≤0.32	dB/km
	1490nm	≤0.21	dB/km
	1550nm	≤0.18	dB/km
	1625nm	≤0.20	dB/km
Attenuation vs. Wavelength max. A difference	1285~1330nm	≤0.03	dB/km
	1525~1575nm	≤0.02	dB/km
Zero dispersion wavelength		1304~1324	nm
Zero dispersion slope		≤0.092	ps/(nm ² *km)
Polarization mode dispersion			
PMD maximum individual fibre		≤0.1	ps/km ^{1/2}
PMD design link value		≤0.04	ps/km ^{1/2}
Cable cut off wavelength		≤1260	nm
Mode field diameter	1310nm	8.8~9.6	um
	1550nm	9.9~10.9	um
Group index of refraction	1310nm	1.4691	
	1550nm	1.4696	
Environmental characteristics			
Temperature cycling	-60°C to +85°C	≤0.05	dB/km
Temperature-humidity cycling	-10°C to +85°C, 4% to 98% RH	≤0.05	dB/km
Water immersion	23°C, 30 days	≤0.05	dB/km
Dry heat	85°C, 30 days	≤0.05	dB/km
Damp heat	85°C, 85%RH, 30 days	≤0.05	dB/km
Mechanical specification			
Proof test		≥100	Kpsi

Macro bending induced loss			
1Turns @10mm Radius	1550nm	≤0.5	dB
1Turns @10mm Radius	1625nm	≤1.5	dB
10Turns @15mm Radius	1550nm	≤0.05	dB
10Turns @15mm Radius	1625nm	≤0.30	dB
100Turns @25mm Radius	1310&1550&1625 nm	≤0.01	dB
Dynamic stress corrosion susceptibility parameter		20	

Cable Sheath Marking:

STRUCTURED CABLE PRODUCTS --- EF-OS2LSB2-8DIST --- 8 Strand OS2 Single Mode Ultra Bendable SCP-EASYFIBER™ w/ Corning® SMF-28® Ultra OS2 9/125 Distribution LSZH EN50575 B2ca-s1a,d0,a1 Indoor/Outdoor UV Sun Res RoHS ****M MMY